

REV.	ECN. NO.	APPD.

A

B

C

D

E





A

B


C

D



E

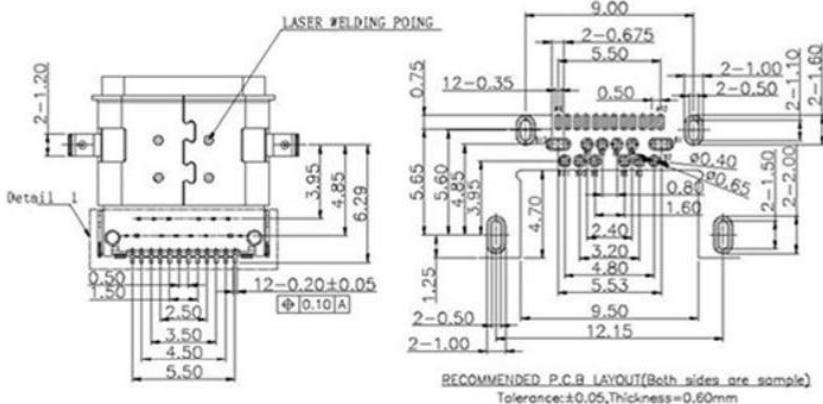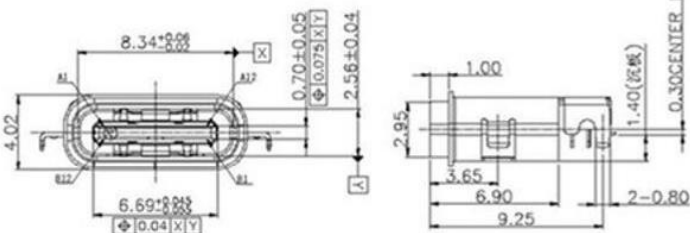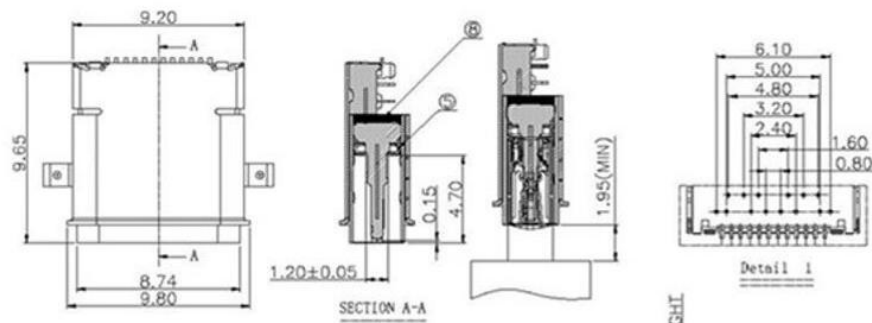

前后组装方式

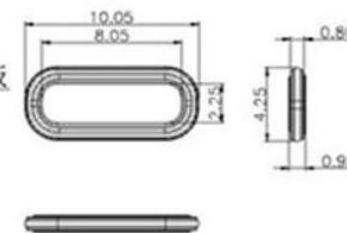

建议防水圈规格 (材质硅橡胶)

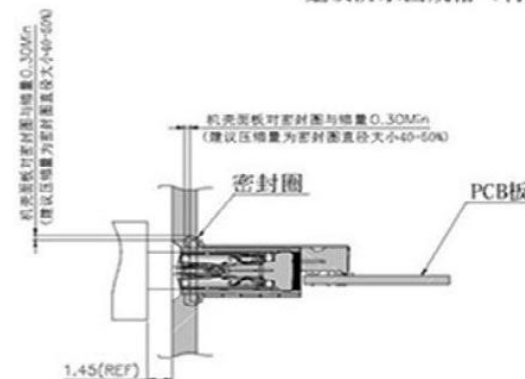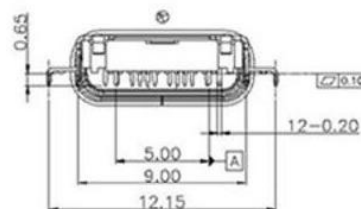

组装面板后公母头对插示意图

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES



3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

X. ±0.50	X* ±2°	UNITS	 东莞市高迪电子有限公司 DONGGUANGAODI ELECTRONICS CO., LTD.										
.X ±0.30	.X* ±1°	mm											
.XX ±0.10	.XX* ±0.5°	MAT'L	PART NO.	TITLE: IP68									
.XXX ±0.05													
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.		FINISH	APPD: RADOM		DWG NO: USB connector								
			CHKD: MARK										
		Q'TY	DR: JANE CHOU 2019/07/11		 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1/1</td><td>1/2</td><td>A2</td></tr></table>			SCALE	SHEET	REV.	1/1	1/2	A2
		SCALE	SHEET	REV.									
1/1	1/2	A2											