


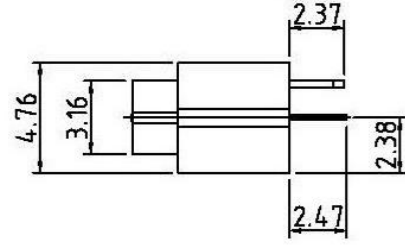


REV.	ECN. NO.	APPD.



建议胶圈尺寸

注：防水圈是厚度1.2mm的硅胶圈，防水圈挤压力，由1.2mm挤压到0.7mm ~ 0.8mm，防水效果好

- NOTES:
- SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE :8N~35N
 7. UNMATING FORCE: 8N~35N
 8. DURABILITY:1500 CYCLES

PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

INTERFACE(FRONT VIEW)

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
								VBUS			

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

X. ±0.50	X.* ±2*	UNITS mm	東莞市高迪電子有限公司 DONGGUANGAODI ELECTRONICS CO.,LTD.
.X ±0.30	.X.* ±1*		
.XX ±0.10	.XX.* ±0.5*		
.XXX ±0.05		MAT'L	PART NO.
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.		FINISH	APPD: RADOM
		Q'TY	CHKD: MARK
		DR: JANE CHOU 2019/07/11	DWG NO:
		USB connector	
		SCALE SHEET REV. 1/1 1/2 A2	

由Autodesk 教育版产品制作

由Autodesk 教育版产品制作