




PIN ASSIGNMENT

PIN NO.	A12&B12	A4&B4
SIGNAL NAME	GND	VBUS
PCB PAD NO.	C1	C2

INTERFACE(FRONT VIEW)


A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
			VBUS								GND
GND								VBUS			
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

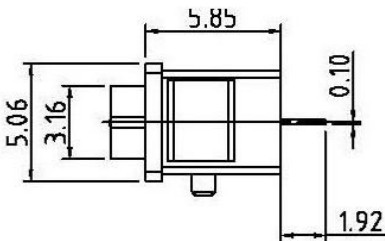




NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE :8N~35N
- UNMATING FORCE: 8N~35N
- DURABILITY:1500 CYCLES

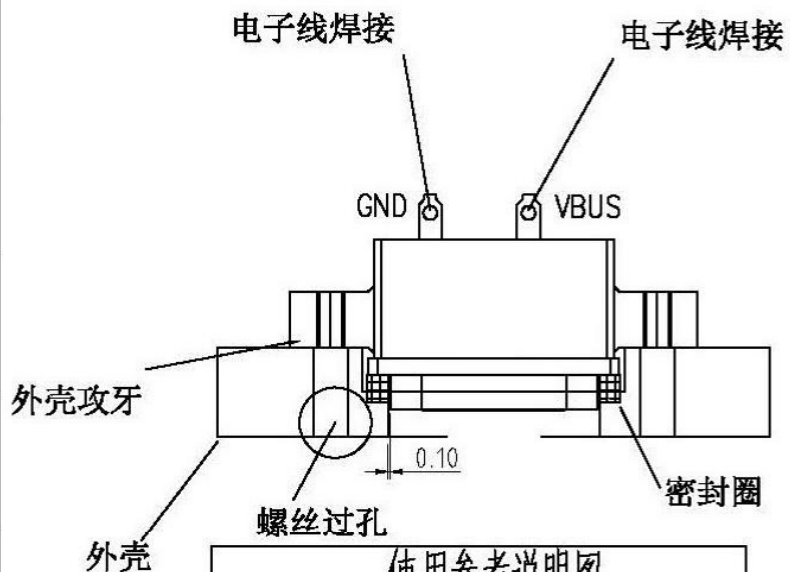

使用参考说明图
无需PCB板,可直接焊线
螺丝由外往内锁 达到防水效果

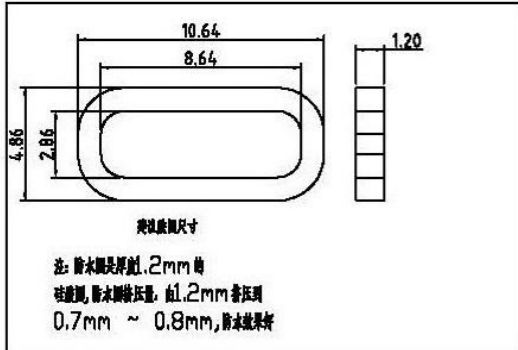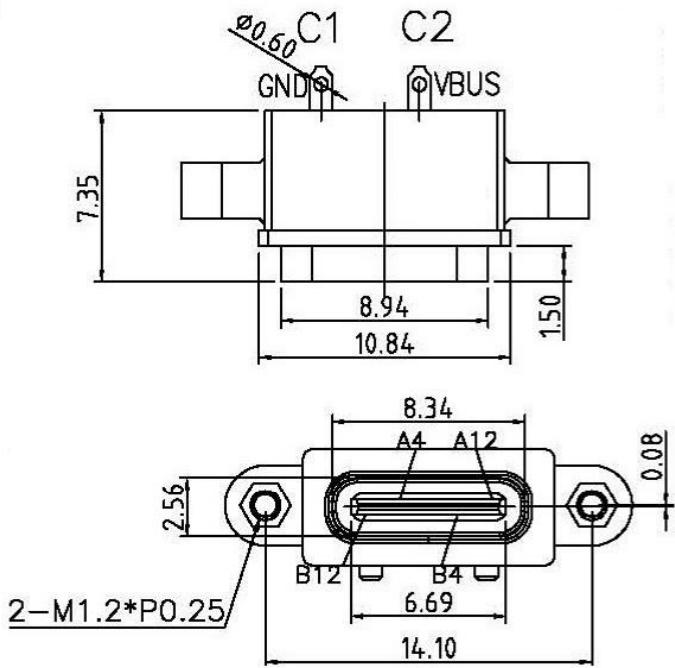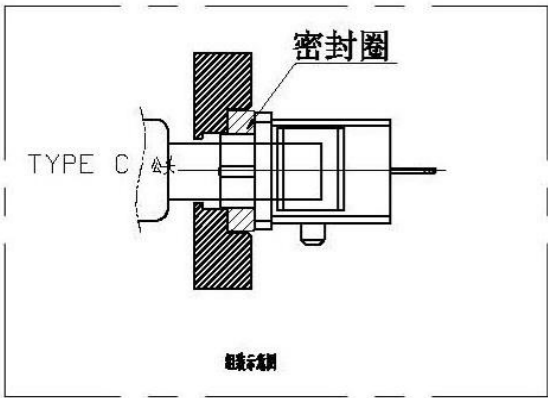


注: 密封圈厚度: 1.2mm 密封圈, 密封圈厚度: 1.2mm 密封圈, 密封圈厚度: 0.7mm ~ 0.8mm, 密封圈厚度

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

X. ±0.50	X.* ±2*	UNITS	mm	PART NO.	TITLE: IP68
.X ±0.30	.X.* ±1*	MAT'L			
.XX ±0.10	.XX.* ±0.5*				
.XXX ±0.05					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.				APPD: RADOM	DWG NO:
				CHKD: MARK	USB connector
				DR: JANE CHOU 2019/07/11	
				SCALE	SHEET
				1/1	1/2
				REV.	A2

东莞市高迪电子有限公司
DONGGUANGAODI ELECTRONICS CO.,LTD.



SCALE SHEET REV.