
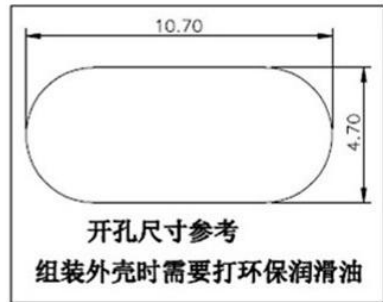
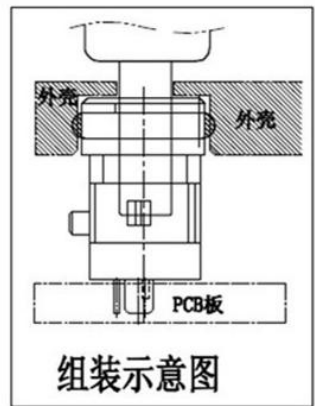


REV.	ECN. NO.	APPD.



- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE :8N~35N
 7. UNMATING FORCE: 8N~35N
 8. DURABILITY:1500 CYCLES

X. ±0.50	X.* ±2*	UNITS mm	 东莞市高迪电子有限公司 DONGGUANGAODI ELECTRONICS CO.,LTD.				
.X ±0.30	.X* ±1*						
.XX ±0.10	.XX* ±0.5*	MAT'L		PART NO.	TITLE: IP68		
.XXX ±0.05							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD		FINISH	APPD: RADOM	DWG NO: USB connector			
			CHKD: MARK				
		Q'TY	DR: JANE CHOU 2019/07/11		SCALE	SHEET	REV.
					1/1	1/2	A2

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	