

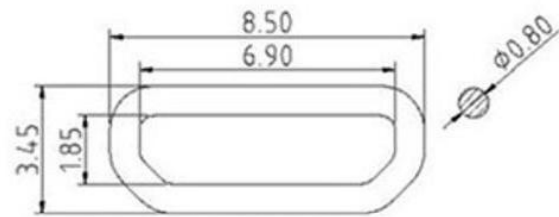
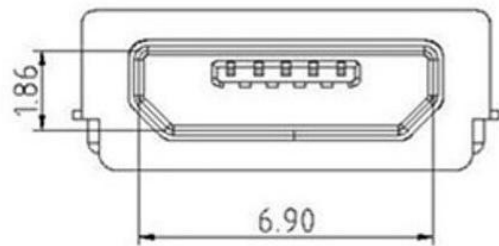
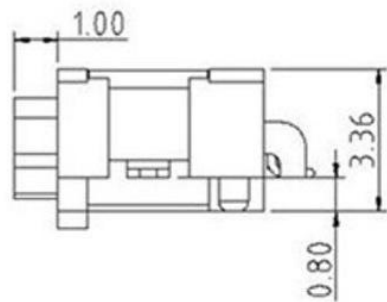
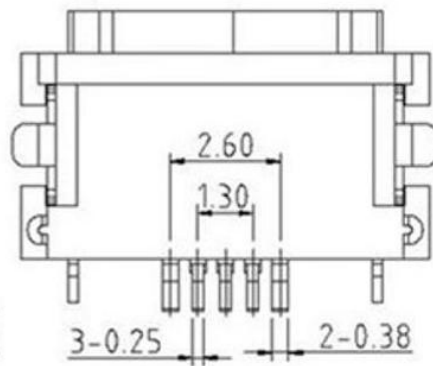


REV.	ECN. NO.	APPD.

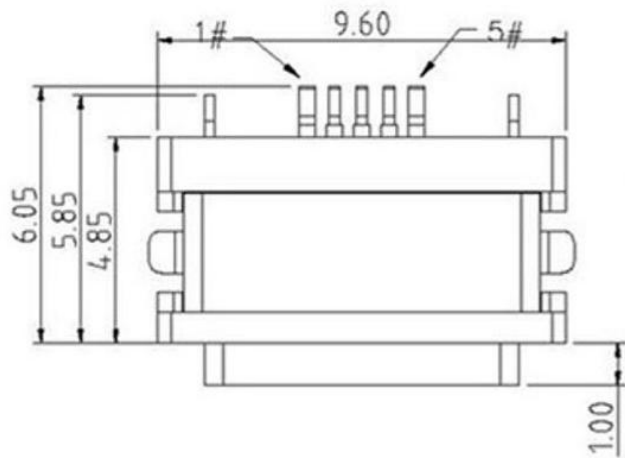

注：防水测试时，直径为0.8mm的测试针
防水测试压力，由0.8mm测试针0.4mm ~ 0.5mm，防水效果好

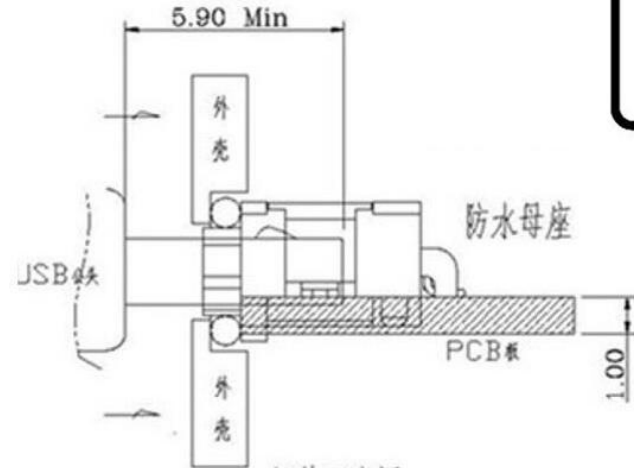

组装示意图

注：设计时，请注意公头插入时的距离，防止公头插不到位。

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

X. ±0.50	X* ±2°	UNITS	 东莞市高迪电子有限公司 DONGGUANGAODIELECTRONICS CO., LTD.	
.X ±0.30	.X* ±1°	mm		
.XX ±0.10	.XX* ±0.5°	MAT'L	PART NO.	TITLE: IP68
.XXX ±0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.			APPD: RADOM	DWG NO:
			CHKD: MARK	USB connector
			DR: JANE CHOU 2019/07/11	
				SCALE SHEET REV.
				1/1 1/2 A2