


注：设计时，请注意公头插入时的距离，防止公头插不彻底。

组装示意图

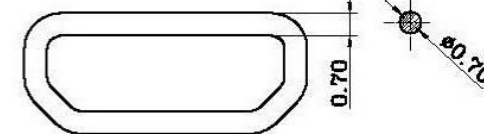

注：防水圈是圆形截面，直径为0.7mm的硅胶圈

防水圈挤压量，由0.7mm挤压到0.3mm ~ 0.4mm，防水效果好

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE :8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY:1500 CYCLES



3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	
ITEM	PART NAME	Q'TY	FINISH	NOTE

X	±0.50	X*	±2*	UNITS	mm
.X	±0.30	.X*	±1*		
.XX	±0.10	.XX*	±0.5*	MAT'L	/
.XXX	±0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.				FINISH	/
				Q'TY	/

东莞市高迪电子有限公司
DONGGUANGAODI ELECTRONICS CO.,LTD.

PART NO. TITLE:
IP68

APPD: RADDM

DWG NO: **USB connector**

CHKD: MARK

DR: JANE CHOU 2019/07/11

SCALE	SHEET	REV.
1/1	1/2	A2