
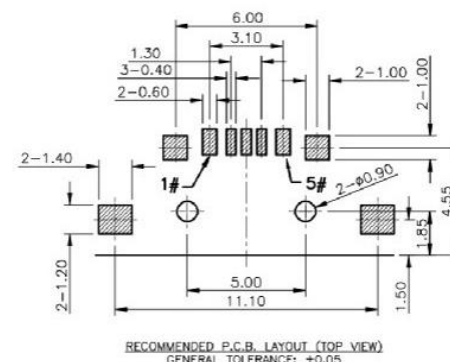
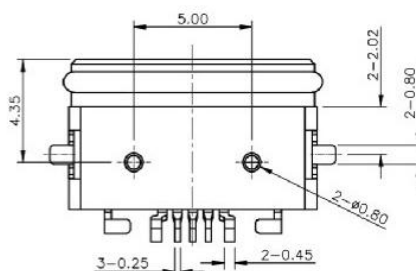
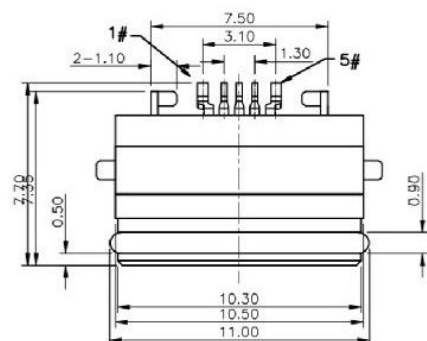


3D VIEW


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY: 1500 CYCLES

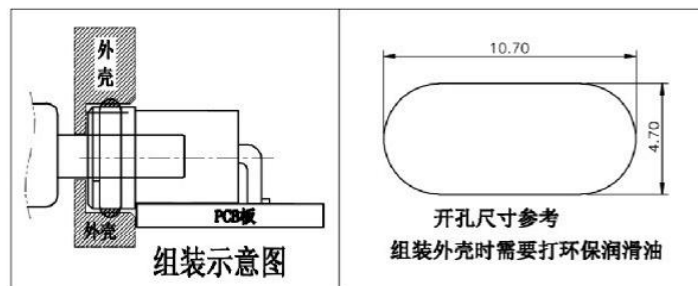

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

X.	± 0.50	X.*	± 2*	UNITS	mm	 东莞市高迪电子有限公司 DONGGUANGAODI ELECTRONICS CO., LTD.			
.X	± 0.30	.X*	± 1*						
.XX	± 0.10	.XX*	± 0.5*	MAT'L		PART NO.	TITLE: IP68		
.XXX	± 0.05								
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.					FINISH	APPD: RADOM		DWG NO:	
					Q'TY	CHKD: MARK			
						DR: JANE CHOU 2019/07/11			
						SCALE	SHEET	REV.	
						1/1	1/2	A2	

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	