
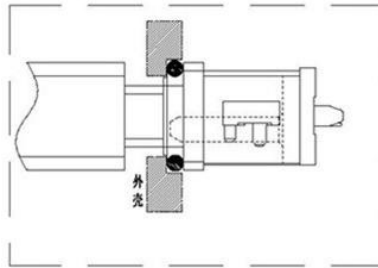


REV.	ECN. NO.	APPD.

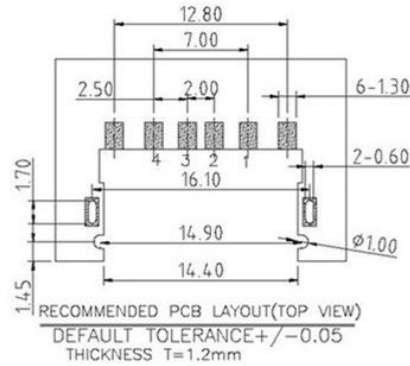



PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	VBUS	D-	D+	GND

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE: 8N~35N
7. UNMATING FORCE: 8N~35N
8. DURABILITY: 1500 CYCLES

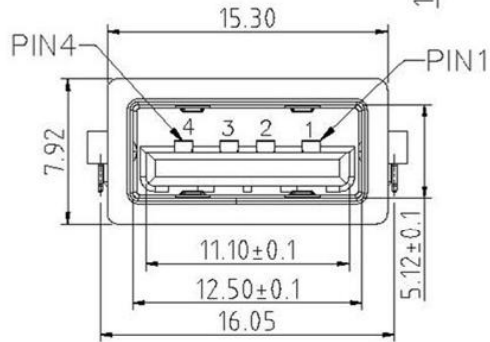

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

X. ± 0.50	X.* $\pm 2^{\circ}$	UNITS	东莞市高迪电子有限公司 DONGGUANGAODI ELECTRONICS CO., LTD.	
.X ± 0.30	.X* $\pm 1^{\circ}$	mm		
.XX ± 0.10	.XX* $\pm 0.5^{\circ}$	MAT'L	PART NO.	TITLE: IP68
.XXX ± 0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF E-ZONE ELECTRONIC TECHNOLOGY CO., LTD.			APPD: RADOM	DWG NO:
			CHKD: MARK	USB connector
Q'TY			DR: JANE CHOU 2019/07/11	
				SCALE SHEET REV. 1/1 1/2 A2