








SUA-110H15-x-S235

COLOR :

Black: B

White : W

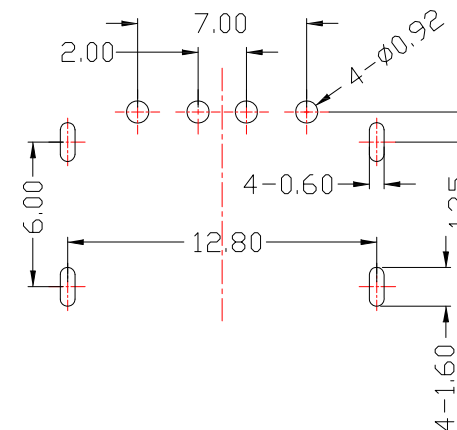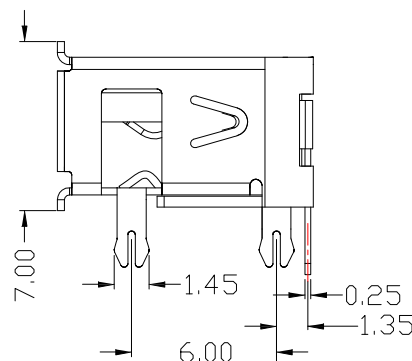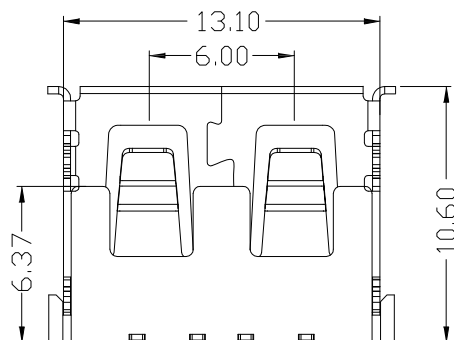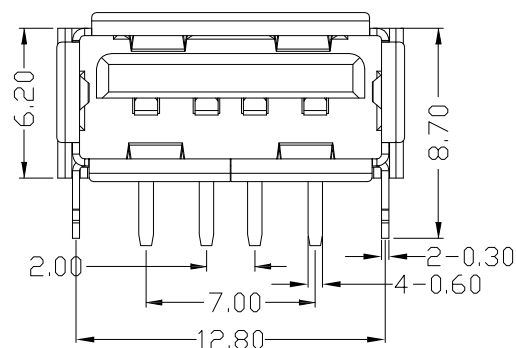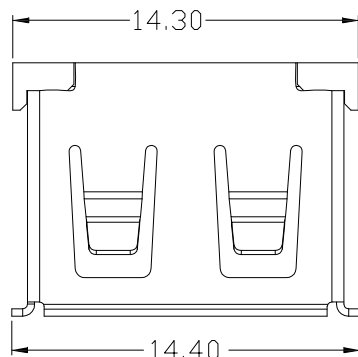

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC FOR 1 MIN
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Operating Temperature: -55°C ~ 85°C

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.57 kgf (Max)
Unmate force: 1.02 kgf (Min)



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 08/18/15

CHECKED BY: Jacky Chen
DATE: 08/18/15

APPROVED BY: Tony Kao
DATE: 08/18/15

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB AF DIP 10.6MM四腳有邊H=6.2
SCALE	1 : 1	DWG NO.	SUA-110H15-x-S235
SHEET NO.	1 of 1	PART NO.	SUA-110H15-x-S235

SIZE
A4
VER
A0

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新為A0版	Jack	081815
1	新增外殼腳到PIN的尺寸	Jack	100413