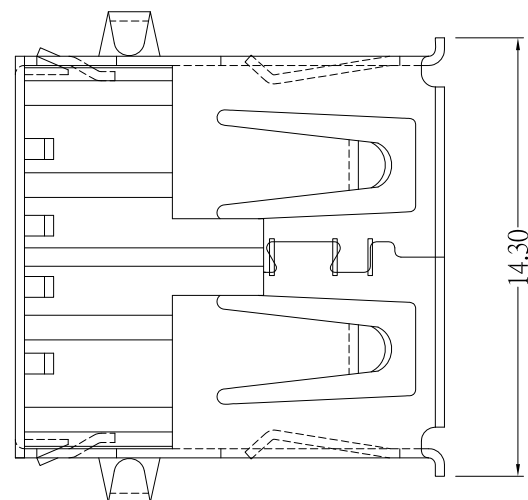
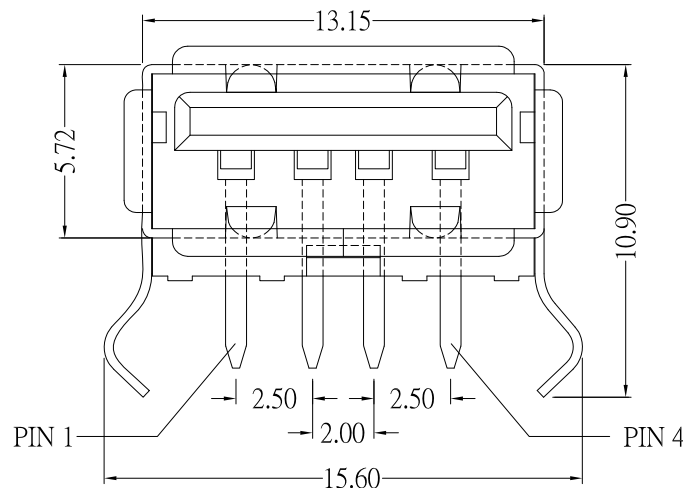
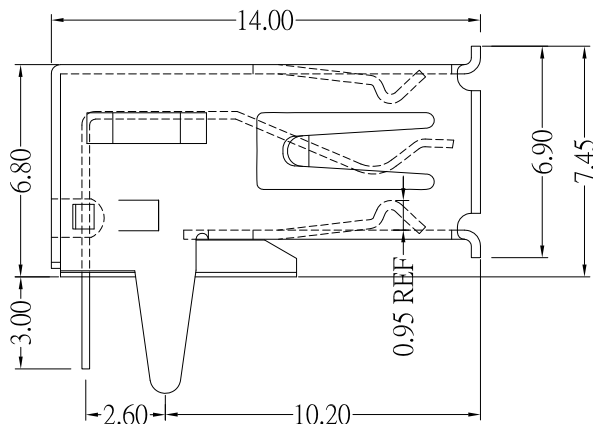


SUA-110H6x-xx-S175

SHELL MATERIAL :

Blank : BRASS
I : SPCC

鍍層厚度 :

Blank : 1u"
2 : 15u"
3 : 30u"

Color :

Black : B
White : W
Blue : BL

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 milliohms Max
- 4.Dielectric Withstanding Voltage:
500 V AC AT Sec Level
- 5.Insulation Resistance: 1000 MEGA ohms Min

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.57 kgf (Max)
Unmate force: 1.02 kgf (Min)
- 2.Terminal Retention: 1.2 kgf (Min)

Material:

- 1.Housing:
High Temperature Thermal Plastics,
UL 94V-0 , PBT
- 2.Contact: BRASS
- 3.Shell: BRASS / SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

6	新增PIN標示	Jack	102214
5	新增7.45的尺寸	Jack	081514
4	新增6.80的尺寸	Jack	052714
3	新增10.20的尺寸	Jack	051614
2	更新料號及材質和鍍層	Jack	112913
1	新增鍍層選項	Jack	072613
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	10/22/14
CHECKED BY:	DATE
Jacky Chen	10/22/14
APPROVED BY:	DATE
Tony Kao	10/22/14

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB AF DIP TYPE
SCALE	1 : 1	DWG NO.	SUA-110H6x-xx-S175
SHEET NO.	1 of 1	PART NO.	SUA-110H6x-xx-S175
		SIZE	A4
		VER	A6