
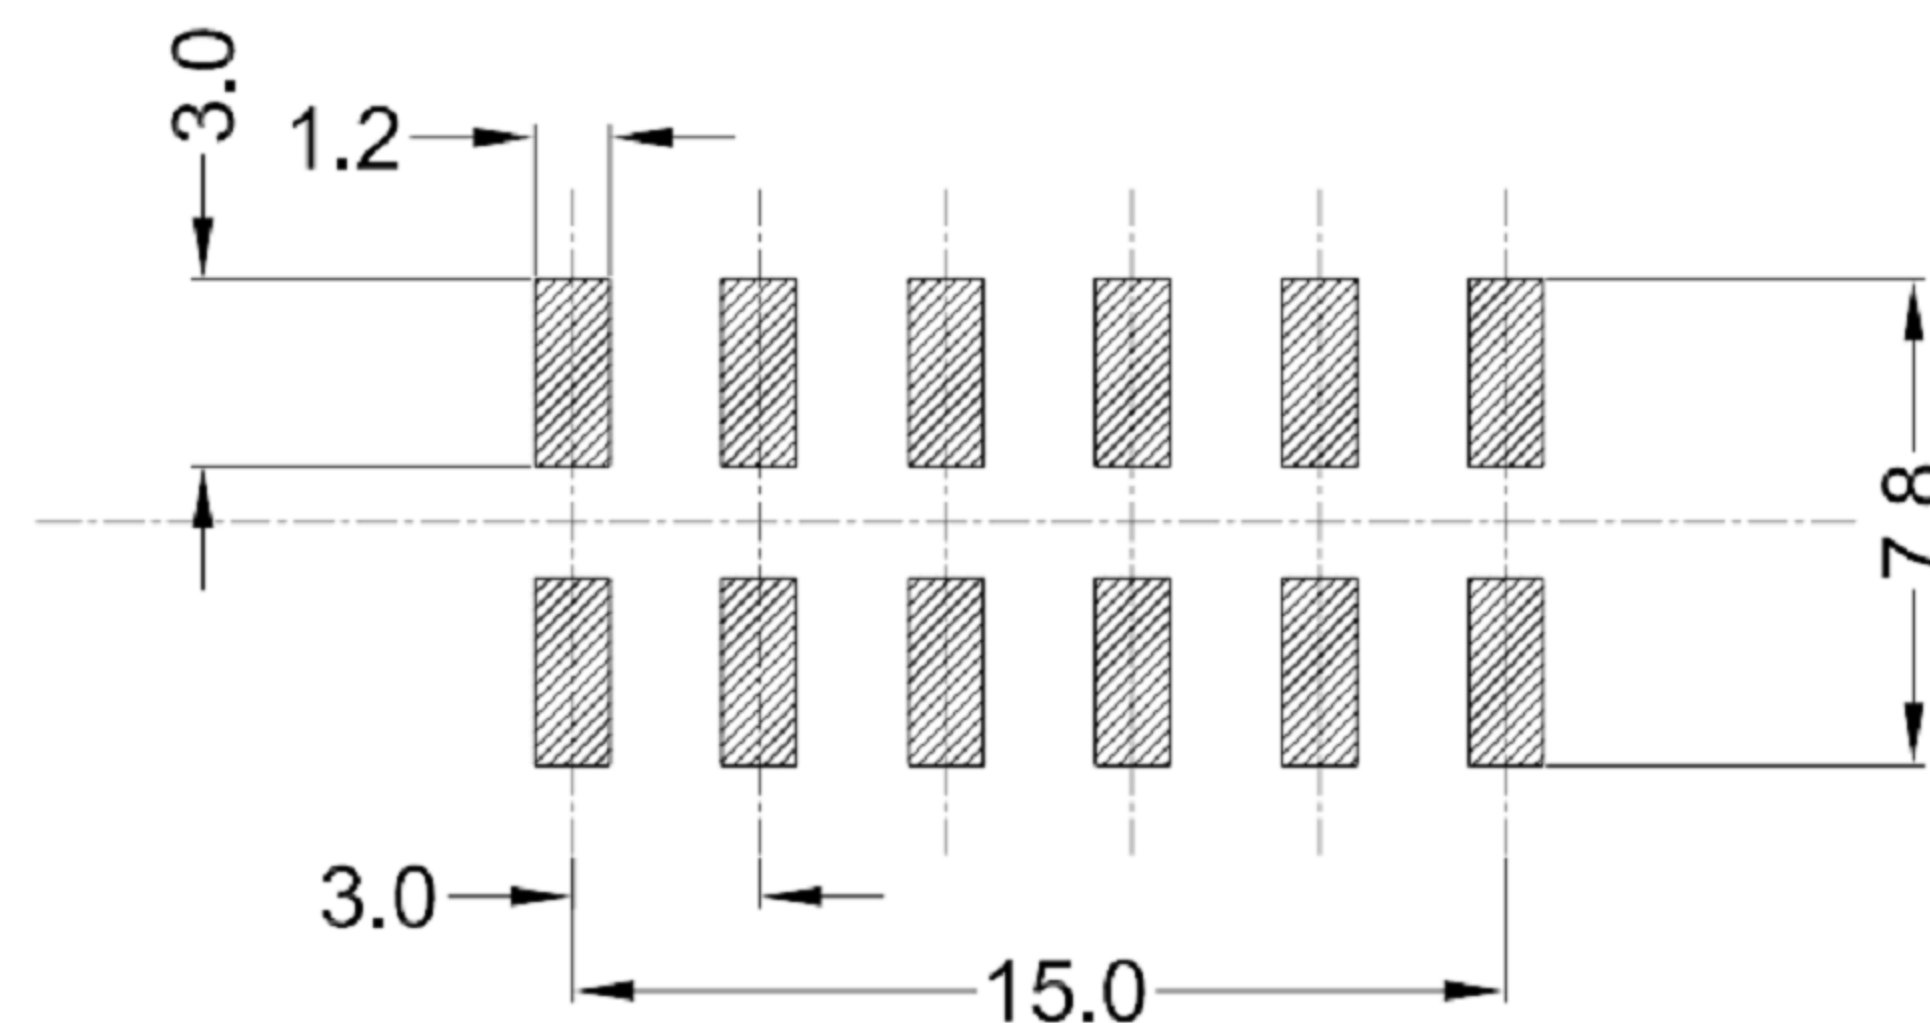


SCHEMATIC(SHORTING)

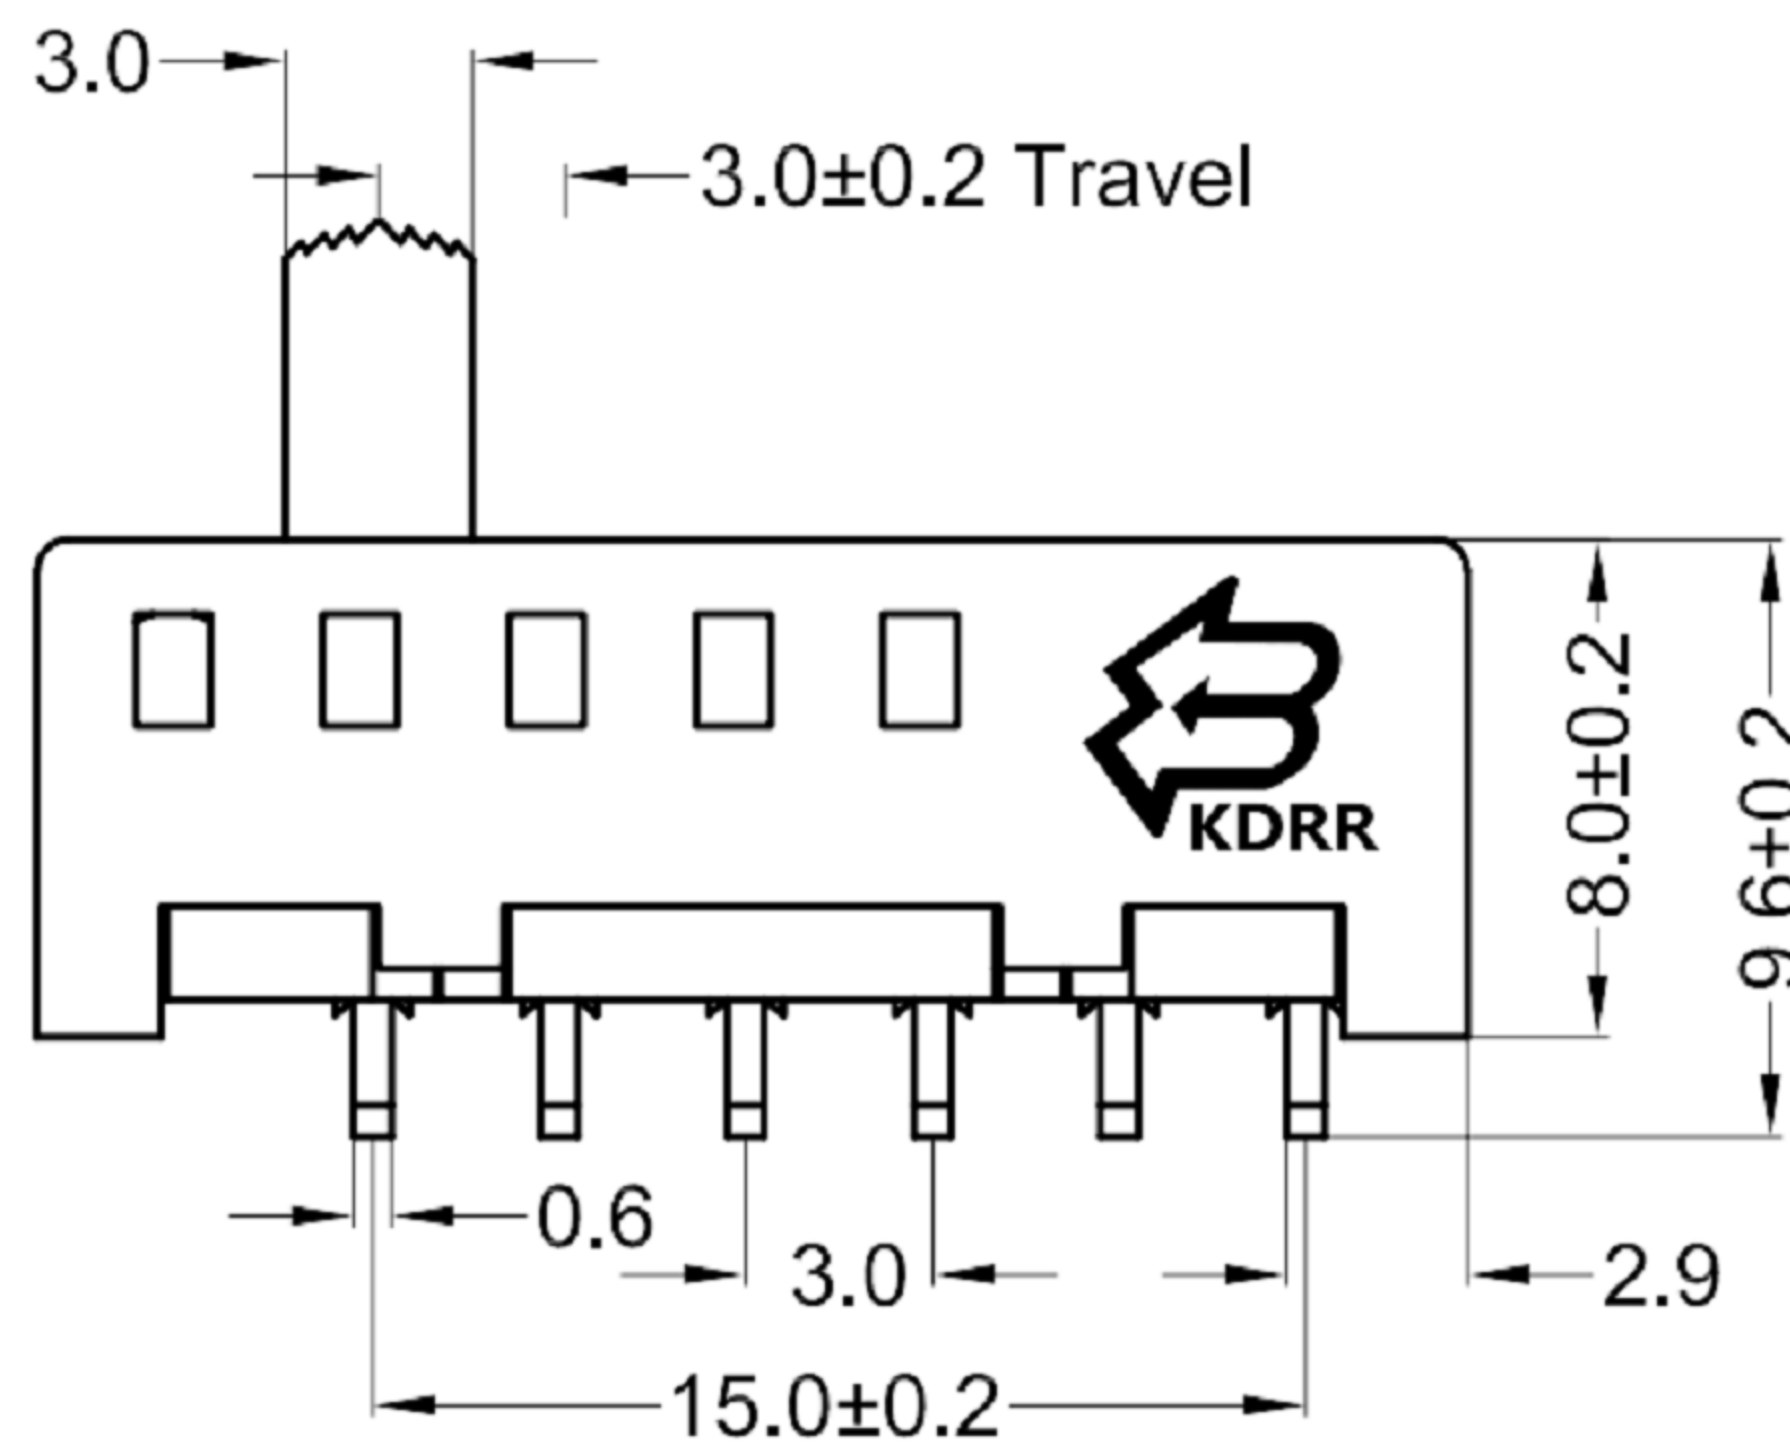

P.C.B LAYOUT


1. 额定负荷: 1A 250V 3A 125V AC
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ DC500V
4. 耐焊温度: $250\pm 5^\circ\text{C}$
5. 使用寿命: 10,000 cycles
6. 使用温度: -25°C to 80°C
7. 使用湿度: $\leq 85\%$ RH
8. 操作力: 450gf 可
9. 手柄长度: 2mm-10mm 可定制

NO.	NAME	MATERIALS	Q'TY	REMARK
6	CONTACT CLIP	BRASS STRIP	2	Ag PLATED
5	SPRING	STEEL WIRE	2	NATURAL
4	TERMINAL	BRASS STRIP	8	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	PA66	1	BLACK


东莞市高迪电子有限公司
 DONG GUAN GAO DI ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY: DATE
 Ming Ming Zou 07/23/13
 CHECKED BY: DATE
 Ning Ning Su 07/23/13
 APPROVED BY: DATE
 Jia Xiang 07/23/13

MAT'L	TITLE	SWITCH SERIES
FINISH	MODLE	SLIDE SWITCH
SCALE	DWG NO.	GD-SS-H25-2511M
SHEET NO.	PART NO.	

SIZE A4
 VER R2