



SUA-110E9x-x-S235

Shell Material :

Blank : Phosphor Bronze

I : SPCC

Color :

White : W

Black : B

SPECIFICATIONS

Electrical:





- 1.Voltage Current Rating: 1.5 AMP, 30VAC
- 2.Contact Resistance: 30 mΩ Max
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Operating Temperature: -35°C ~ 85°C
- 6.Mating Force: 3.57 Kg Max
- 7.Umating Force: 1.02 Kg Min

Material:

- 1.Housing: PBT , UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze / Spcc

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

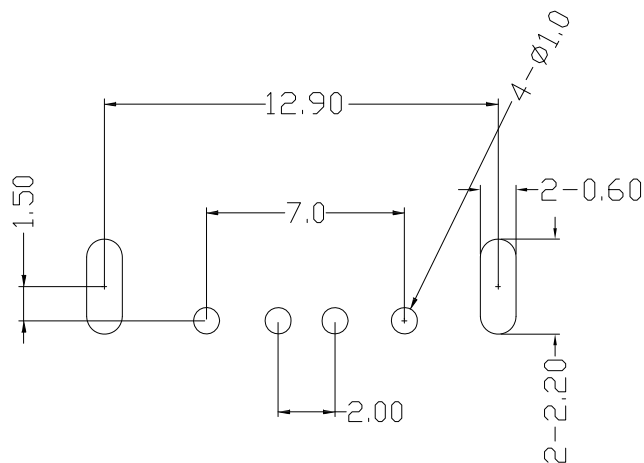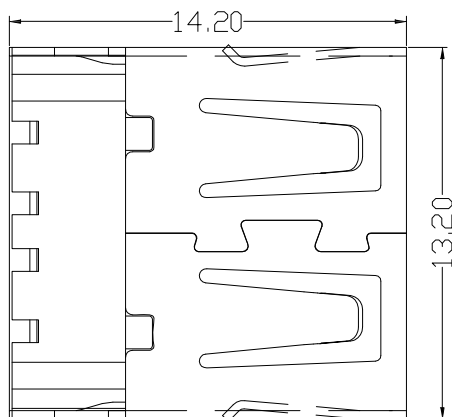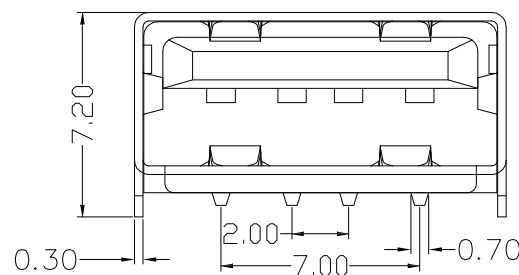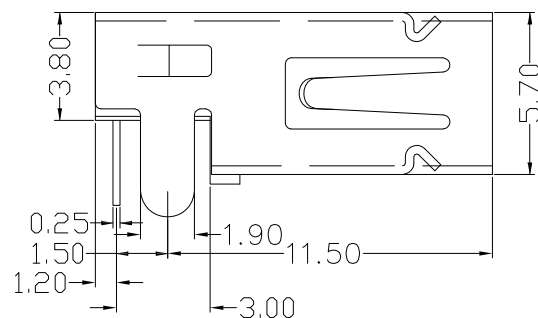

RECOMMEND P. C. B LAYOUT COMPONENT

6	更新尺寸	Jack	080715	 东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch Jack Co., Ltd.	DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR	
5	更新pcb layout 外殼孔	Jack	072215		Jack Lu	08/07/15					
4	更新為AO版	Jack	031815		CHECKED BY:	DATE	FINISH		MODLE	USB A/F 沉板H: 3.8mm 無捲邊	
3	新增2.90和11.20兩個尺寸	Jack	121614		Jacky Chen	08/07/15	SCALE	1 : 1	DWG NO.	SUA-110E9x-x-S235	SIZE A4
2	更新材質及SPEC	Jack	053014		APPROVED BY:	DATE	SHEET NO.	1 of 1	PART NO.	SUA-110E9x-x-S235	VER A2
1	更新尺寸	Jack	050514	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM				
ITEM NO.	DESCRIPTION	DRAWN	DATE								