
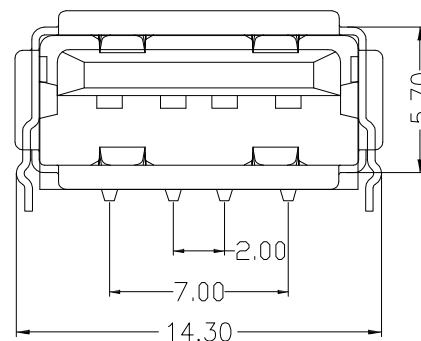


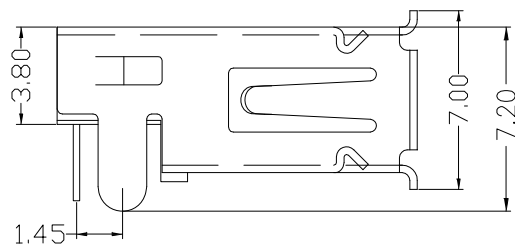

SUA-110E-x-S235

Color
White : W
Black : B

SPECIFICATIONS

Electrical:



- 1.Voltage Current Rating: 1.5A , 30VAC
- 2.Contact Resistance: 30 m Ω Max
- 3.Insulation Resistance: 1,000 MEGA ohms Min
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Operating Temperature: -35°C ~ 85°C
- 6.Mating Force: 3.5Kg Max
- 7.Unmating Force: 0.7Kg Min

Material:

- 1.Housing: Thermoplastics, UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

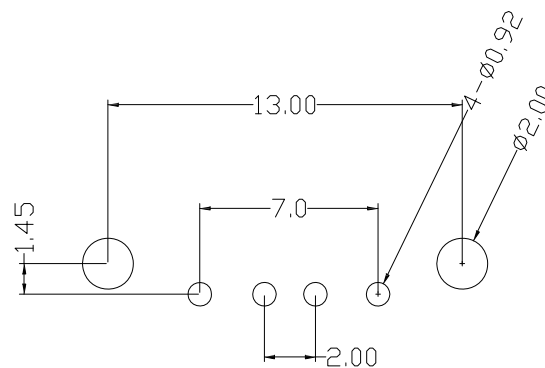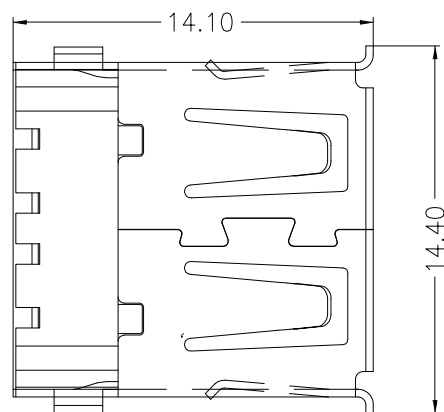

Recommended P.C.B Layout



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
02/19/14
DATE
02/19/14
DATE
02/19/14

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB AF DIP 沉板 H:3.8mm
SCALE	1 : 1	DWG NO.	SUA-110E-x-S235
SHEET NO.	1 of 1	PART NO.	SUA-110E-x-S235

SIZE
A4
VER
R