




P.C.B LAYOUT MOUNTING PATTERN

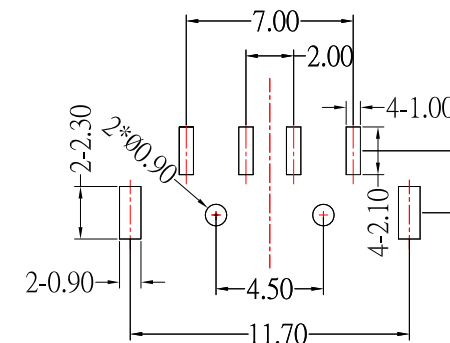

NOTE:

1.MATERIAL:

- a.HOUSING: PA9T GLASS FIBRE UL94 V-0 , BLACK ;
- b.CONTACT: BRASS ;
- c.SHELL: SPCC ;

2.ELECTRIC

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX ;
- b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN ;
- c.DIELECTRIC VOLTAGE: 500 V AC ONE SEC LEVEL ;
- d.OPERATING TEMPERATURE: -55°C~+85°C .

SUA-112M3-x-x-S129

鍍層厚度:		COLOR :
Blank : 1u"		Black: B
2 : 15u"		White : W
3 : 30u"		

3	SHELL	SPCC	NICKRL PLATED	Cu + Ni	1
2	PIN TERM	BRASS	GOLD/TIN PLATED	Au + Sn + Ni	4
1	HOUSING	PA9T	BLACK		1
NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
DRAWN BY:		DATE	MAT'L	TITLE	CONNECTOR
Jack Lu		01/14/15			
CHECKED BY:		DATE	FINISH	MODLE	USB AM SINK TYPE H:1.8mm
Jacky Chen		01/14/15			
APPROVED BY:		DATE	SCALE	DWG NO.	SUA-112M3-x-x-S129
Tony Kao		01/14/15	1 : 1		
			SHEET NO.	PART NO.	SUA-112M3-x-x-S129
					SIZE
					A4
					VER
					R1



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

2	新增P.C.B LAYOUT尺寸	Jack	011415
1	Drawing update	FrankWu	040312
ITEM NO.	DESCRIPTION	DRAWN	DATE