








SUA-110H-30x-S277

鍍層厚度:

Blank : 1u"

2 : 15u"

3 : 30u"

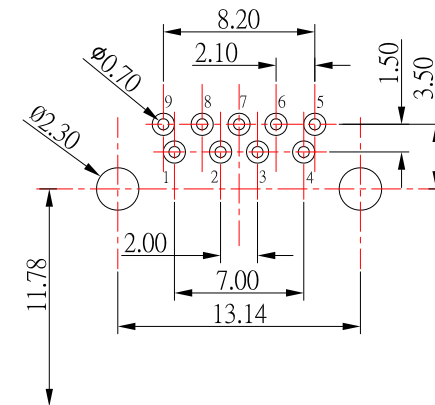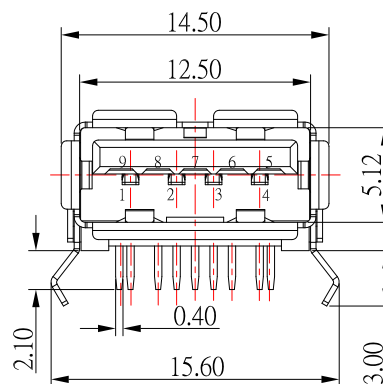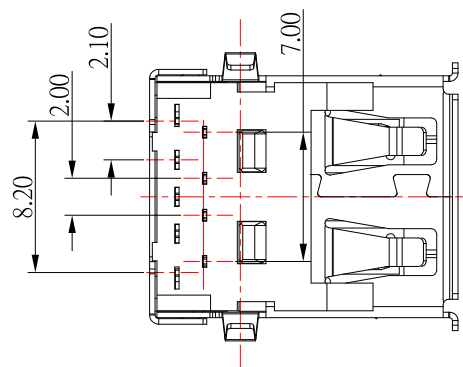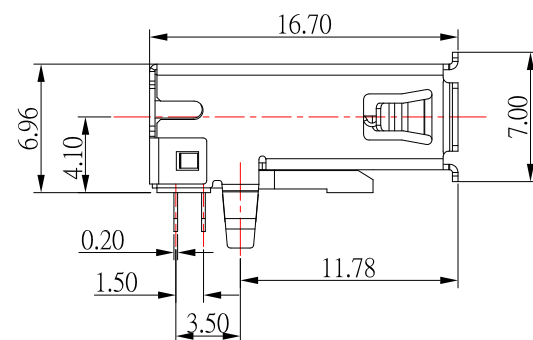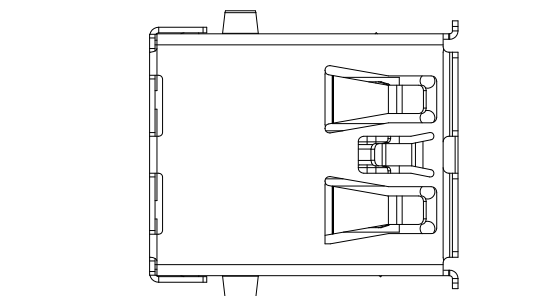

RECOMMENDED PCBA LAYOUT

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS;

1.1 CONTACT CURRENT RATING: 1.5 A

1.1 CONTACT RESISTANCE: 30mΩ MAX

1.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 V

1.3 INSULATION RESISTANCE: 100 MΩ MIN

1.4 OPERATING TEMPERATURE: -40℃ ~ 85℃

2.MATERIAL:

2.1 HOUSING: PBT, UL 94V-0

2.2 CONTACT: PHOSPHOR BRONZE

2.3 SHELL: BRASS

3.PLATING:

3.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

3.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu

DATE: 03/31/15

CHECKED BY: Jacky Chen

DATE: 03/31/15

APPROVED BY: Tony Kao

DATE: 03/31/15

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	USB AF 3.0 90度DIP 彎腳
SCALE	1 : 1	DWG NO.	SUA-110H-30x-S277
SHEET NO.	1 of 1	PART NO.	SUA-110H-30x-S277

SIZE
A4

VER
R1

ITEM NO.
1

DESCRIPTION
更新圖面

DRAWN
Jack

DATE
033115