

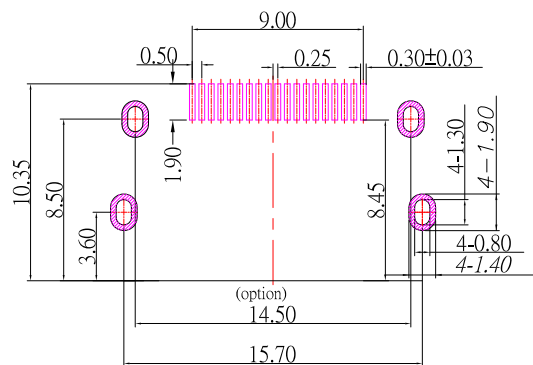
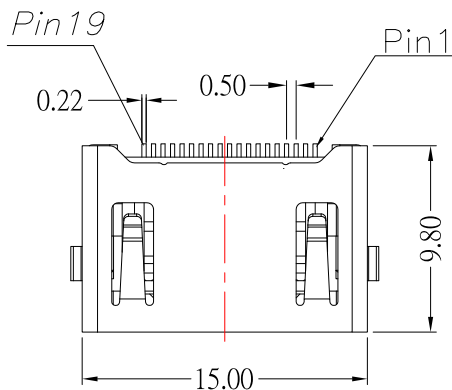


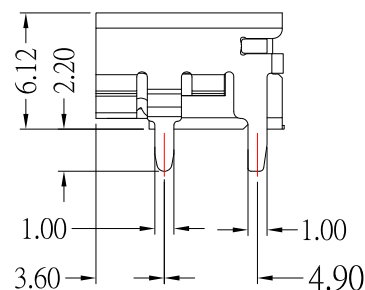

RECOMMENDED PCB LAYOUT (TOP VIEW)

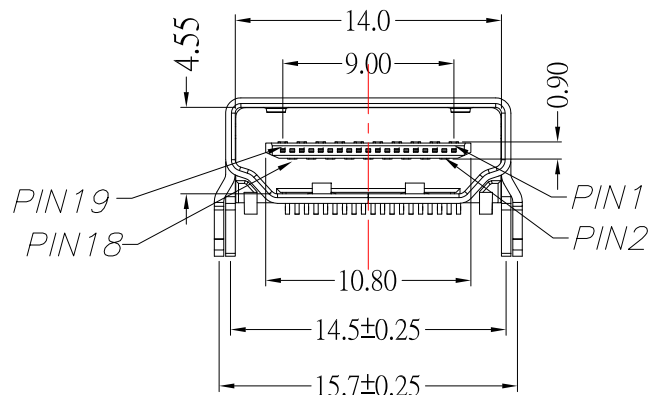

NOTE:

1.MATERIAL:

1.1 HOUSING: LCP,Black

1.2 CONTACT: BRASS

1.3 SHELL: BRASS

2.PLATING :

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS ;

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

3.ELECTRICAL:

3.1 RATING CURRENT: 0.5A

3.2 RATING VOLTAGE: 40V DC

3.3 CONTACT RESISTANCE: 30 mΩ Max

3.4 INSULATION RESISTANCE: 1000MΩ Min

3.5 WITHSTANDING VOLTAGE: 500V DC / minute



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu

DATE
03/19/20

CHECKED BY:
Jacky Chen

DATE
03/19/20

APPROVED BY:
Tony Kao

DATE
03/19/20

MAT'L

TITLE

CONNECTOR

FINISH

MODLE

HDMI A/F 短體無耳無柱 SMT

SCALE

1 : 1

DWG NO.

HDMI-19P-SND5-S277

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新圖面	Jack	031920
1	更新料號	Jack	021115