




HDMI-D-19M1-x-S273

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

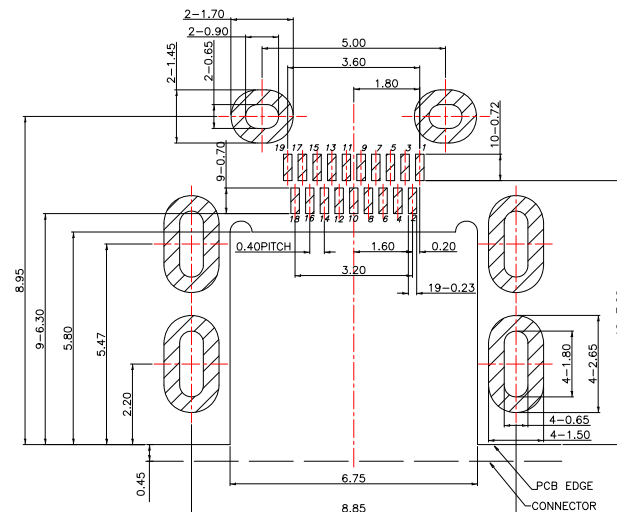

RECOMMENDED PCB LAYOUT(TOP VIEW)

Material:

- 1.Housing: High Temperature Thermal Plastics,UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Stainless Steel

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall

- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 03/11/14
DATE: 03/11/14
DATE: 03/11/14

MAT'L
FINISH
SCALE

1 : 1

TITLE
MODLE
DWG NO.

CONNECTOR
HDMI DTYPE 沉板, 外殼鍍銀
HDMI-D-19M1-x-S273

SIZE
A4
VER
R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	更新料號	Jack	031114
1	新增PCB-pin標號	Jack	012414