

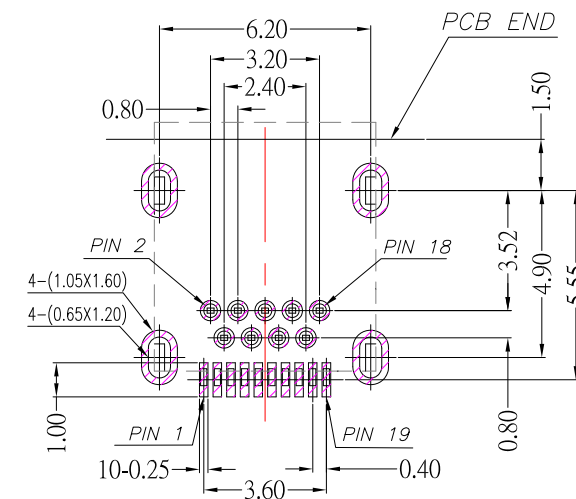
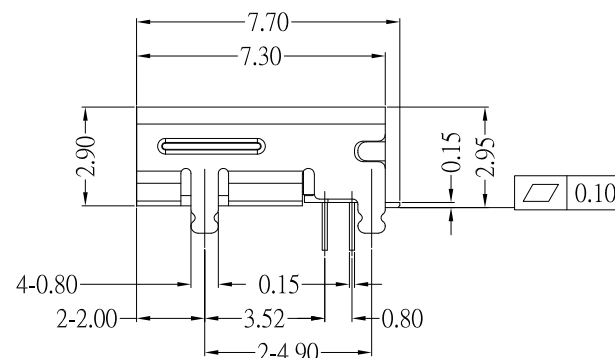


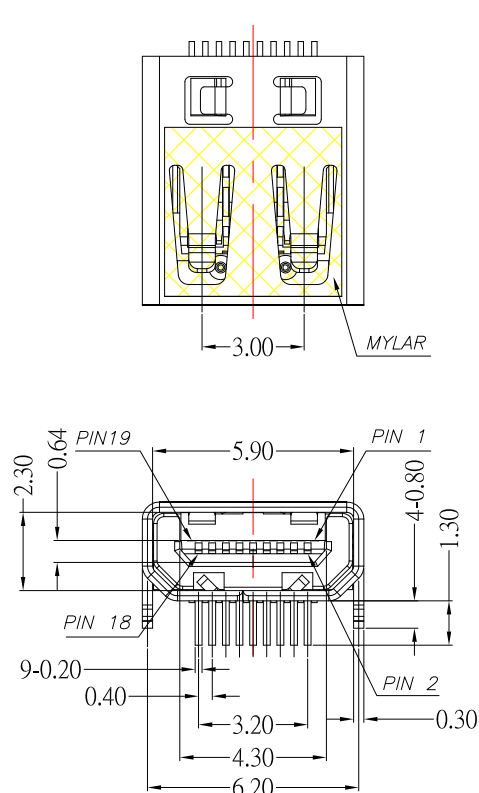

P.C.B LAYOUT MOUNTING PATTERN
(TOP VIEW)

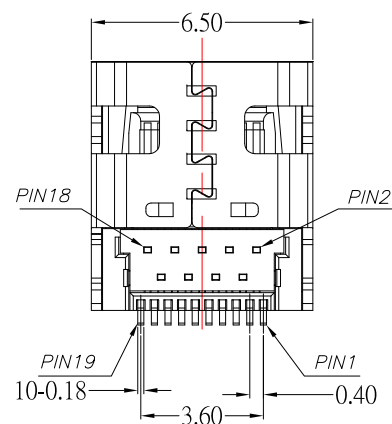

MATERIALS

1. HOUSING : THERMOPLASTIC (UL 94V-0).
2. TERMINAL : PHOSPHOR BRONZE PLATING SEE TABLE
3. SHELL : BRASS,NICKEL PLATED OVERALL.

SPECIFICATION

1. CURRENT RATING : 0.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 100MΩ MIN AT 500V DC.
4. OPERATING TEMPERATURE : -25°C TO +85°C.
5. DURABILITY : 5000 CYCLES.



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:
Jack Lu
10/30/12
CHECKED BY:
Jacky Chen
10/30/12
APPROVED BY:
Tony Kao
10/30/12

DATE
10/30/12
DATE
10/30/12
DATE
10/30/12

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
HDMI D TYPE 雙排DIP / 單排SMT
HDMI-D-19PD2-S165
HDMI-D-19PD2-S165

SIZE
A4
VER
R