



HDMI-D-19PD1-x-S273

鍍層厚度:

Blank : 1u"

2 : 15u"

3 : 30u"

Material:

1.Housing: LCP,UL 94V-0

2.Contact: Phosphor Bronze

3.Shell: Phosphor Bronze

4.Mylar: PI Film



Finish:

1.Contact: Plated Gold in Mating Area ;





Tin Plated on Solder Balls ;

Nickel under plated overall

2.Shell: Nickel under Plated surface layer

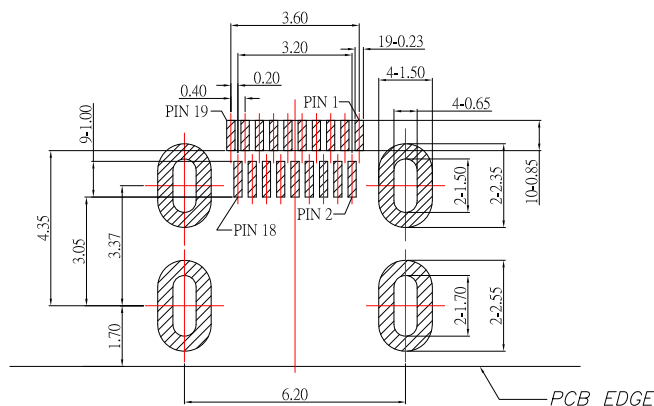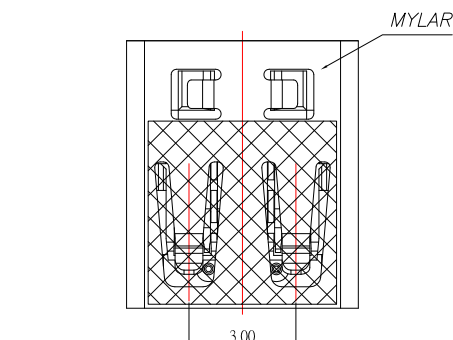

RECOMMENDED PCB LAYOUT THICKNESS
TOP VIEW

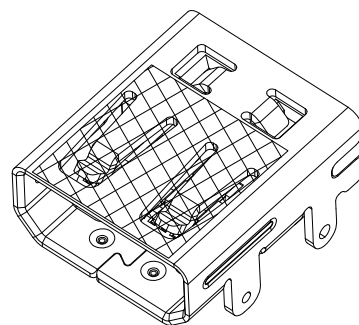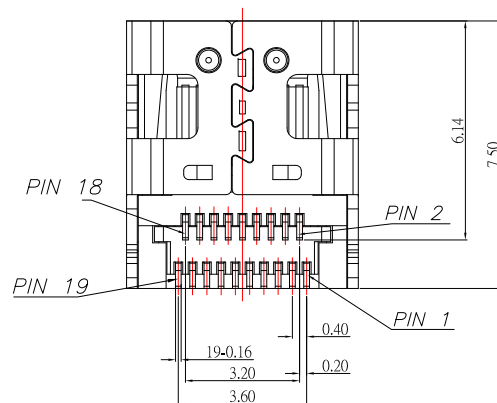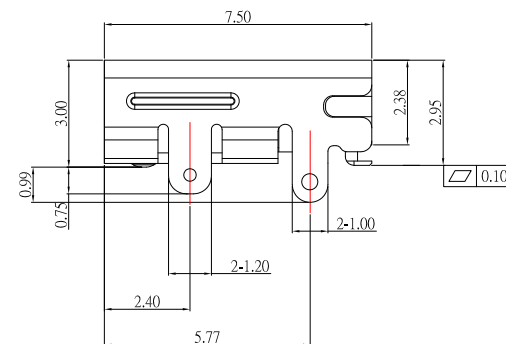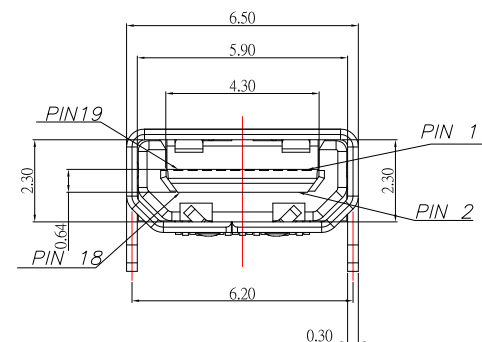

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
08/04/15
DATE
08/04/15
DATE
08/04/15

MAT'L	TITLE	CONNECTOR
FINISH	MODLE	HDMI DTYPE Female SMT Shell DIPX4
SCALE	DWG NO.	HDMI-D-19PD1-x-S273
SHEET NO.	PART NO.	HDMI-D-19PD1-x-S273

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新PIN編號	JACK	080415
2	更新鍍層	JACK	042915
1	修改材質及鍍層	JACK	041014