

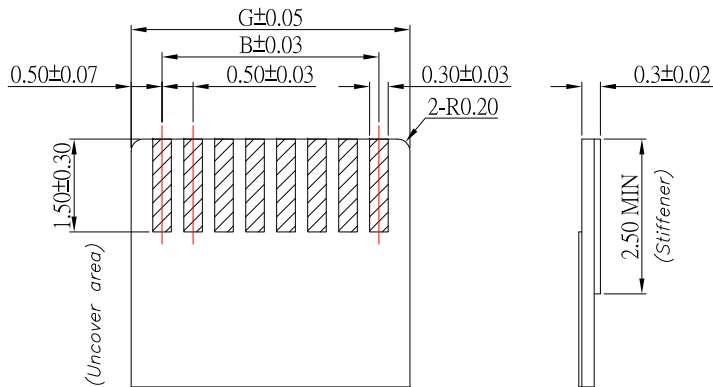
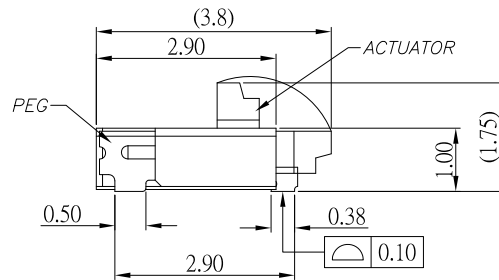
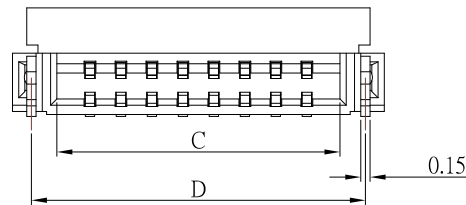


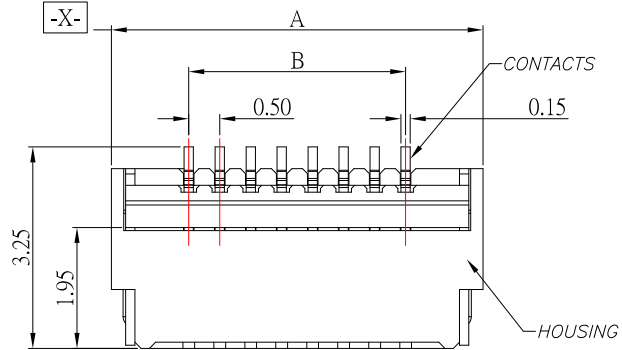

Applicable FPC

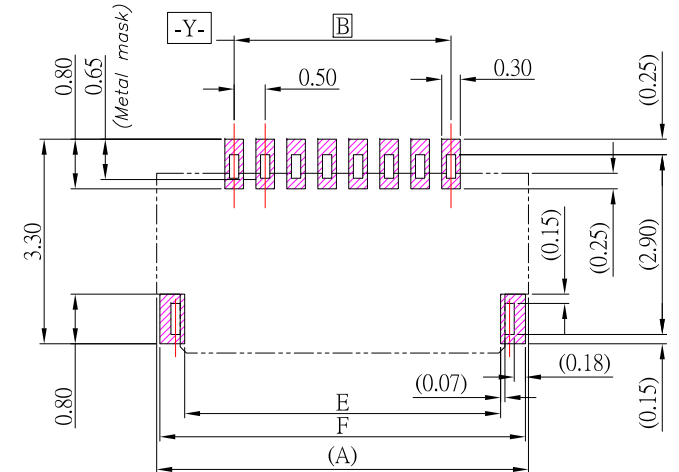

RECOMMEND PCB LAYOUT

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HIGH-TEMP
- 1.2 ACTUATOR: HIGH-TEMP
- 1.3 CONTACT: COPPER ALLOY
- 1.4 PEG: COPPER ALLOY

2. PLATING:

- 2.1 CONTACT: GOLD PLATED ON NICKEL OVERALL
- 2.2 LEG: TIN PLATED ON NICKEL OVERALL

3. RATING:

- 3.1 CURRENT RATING: 0.5A AC/DC
- 3.2 VOLTAGE RATING: 50V AC/DC
- 3.3 TEMPERATURE RANGE: -55°C~+85°C

40	22.00	19.50	20.57	21.39	21.10	21.90	20.50
34	19.00	16.50	17.57	18.39	18.10	18.90	17.50
32	18.00	15.50	16.57	17.39	17.10	17.90	16.50
30	17.00	14.50	15.57	16.39	16.10	16.90	15.50
28	16.00	13.50	14.57	15.39	15.10	15.90	14.50
26	15.00	12.50	13.57	14.39	14.10	14.90	13.50
24	14.00	11.50	12.57	13.39	13.10	13.90	12.50
22	13.00	10.50	11.57	12.39	12.10	12.90	11.50
20	12.00	9.50	10.57	11.39	11.10	11.90	10.50
16	10.00	7.50	8.57	9.39	9.10	9.90	8.50
14	9.00	6.50	7.57	8.39	8.10	8.90	7.50
Number of Contacts	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

01/10/19

CHECKED BY:

Jacky Chen

DATE

01/10/19

APPROVED BY:

Tony Kao

DATE

01/10/19

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

0.5FPC H1.0 後掀式 14PIN以上 0.3 CABLE

FPC05L3-10xx-C3-S304

FPC05L3-10xx-C3-S304

SIZE

A4

VER

R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------