


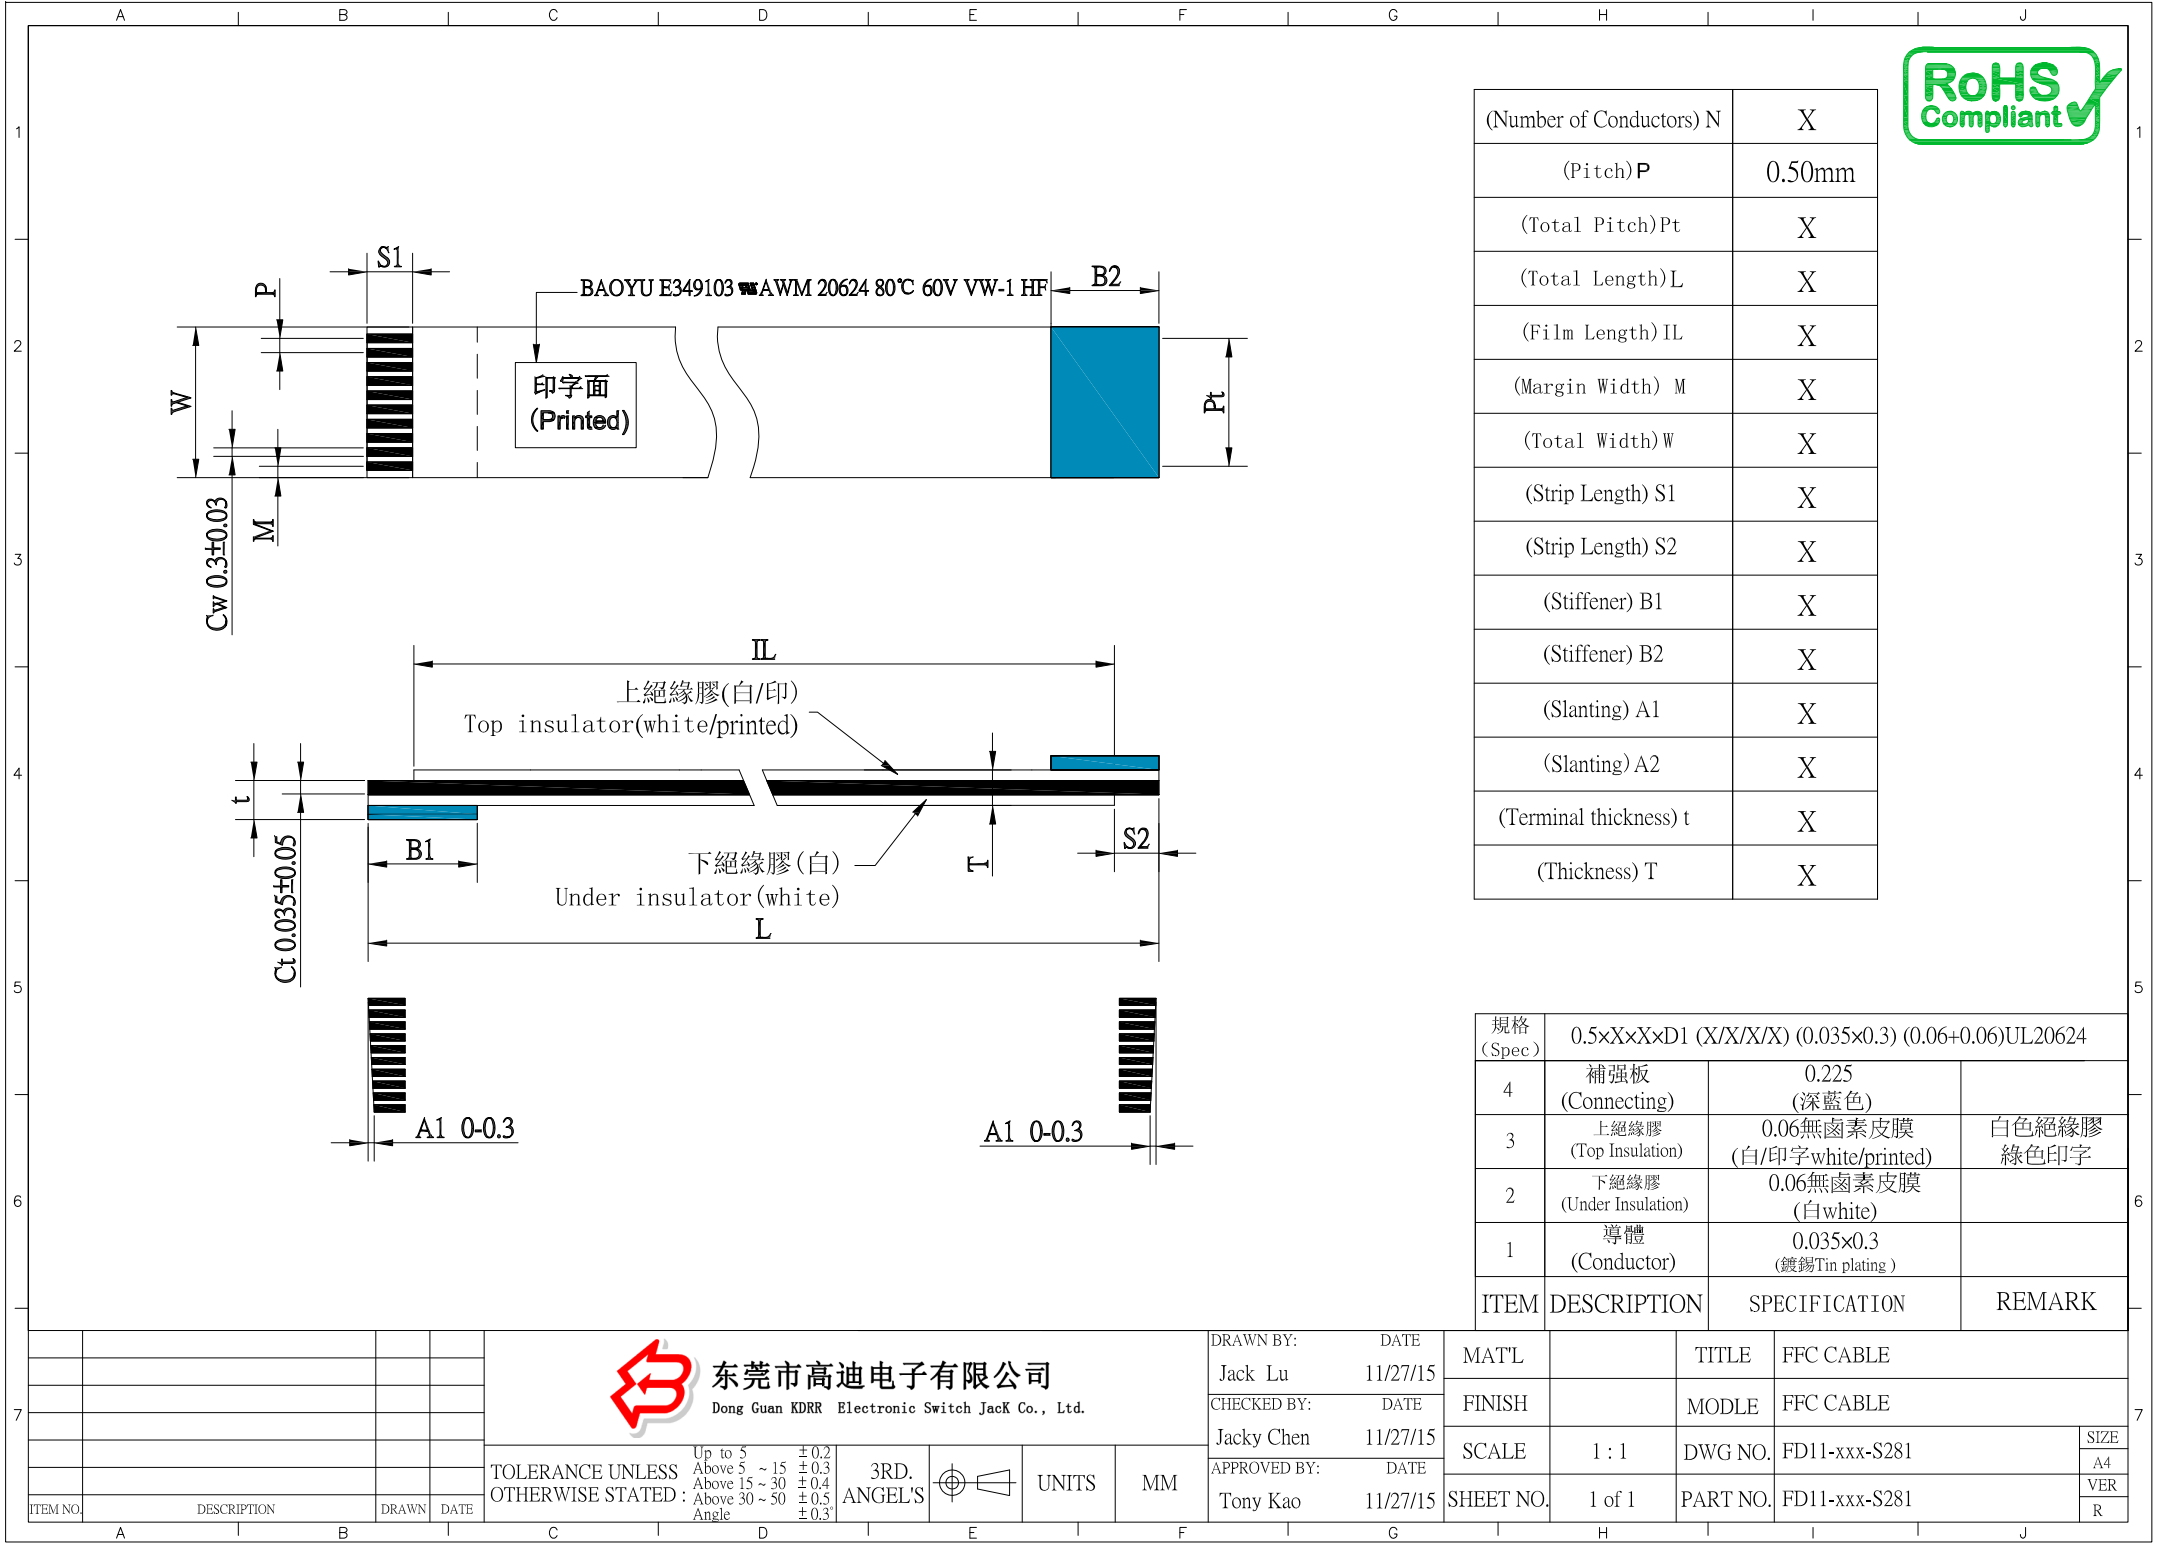

(Number of Conductors) N	X
(Pitch) P	0.50mm
(Total Pitch) Pt	X
(Total Length) L	X
(Film Length) IL	X
(Margin Width) M	X
(Total Width) W	X
(Strip Length) S1	X
(Strip Length) S2	X
(Stiffener) B1	X
(Stiffener) B2	X
(Slanting) A1	X
(Slanting) A2	X
(Terminal thickness) t	X
(Thickness) T	X

規格 (Spec)	0.5×X×X×D1 (X/X/X/X) (0.035×0.3) (0.06+0.06)UL20624		
4	補強板 (Connecting)	0.225 (深藍色)	
3	上絕緣膠 (Top Insulation)	0.06無鹵素皮膜 (白/印字white/printed)	白色絕緣膠 綠色印字
2	下絕緣膠 (Under Insulation)	0.06無鹵素皮膜 (白white)	
1	導體 (Conductor)	0.035×0.3 (鍍錫Tin plating)	
ITEM	DESCRIPTION	SPECIFICATION	REMARK

7					 东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch JacK Co., Ltd.	DRAWN BY: DATE		MAT'L		TITLE	FFC CABLE		7					
						Jack Lu	11/27/15				FINISH			MODLE	FFC CABLE			
						Jacky Chen	11/27/15				SCALE	1 : 1		DWG NO.	FD11-xxx-S281	SIZE		
															A4			
					TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM	APPROVED BY: DATE	SHEET NO.	1 of 1	PART NO.	FD11-xxx-S281	VER		
ITEM NO.	DESCRIPTION			DRAWN	DATE					Tony Kao	11/27/15				R			
A		B		C		D	E		F		G		H		I		J	