




(Number of Conductors) N	X
(Pitch) P	1.00mm
(Total Pitch) Pt	X
(Total Length) L	X
(Film Length) IL	X
(Margin Width) M	X
(Total Width) W	X
(Strip Length) S1	X
(Strip Length) S2	X
(Stiffener) B1	X
(Stiffener) B2	X
(Slanting) A1	X
(Slanting) A2	X
(Terminal thickness) t	X
(Thickness) T	X

規格 (Spec)	1.0×X×X×C1 (X/X/X/X) (0.035×0.65) (0.06+0.06)UL20624		
4	補强板 (Connecting)	0.225 (深藍色)	
3	上絕緣膠 (Top Insulation)	0.06 (白/印字white/printed)無鹵素皮膜	
2	下絕緣膠 (Under Insulation)	0.06 (白white)無鹵素皮膜	
1	導體 (Conductor)	0.035×0.65(Tin Plating)	
ITEM	DESCRIPTION	SPECIFICATION	REMARK

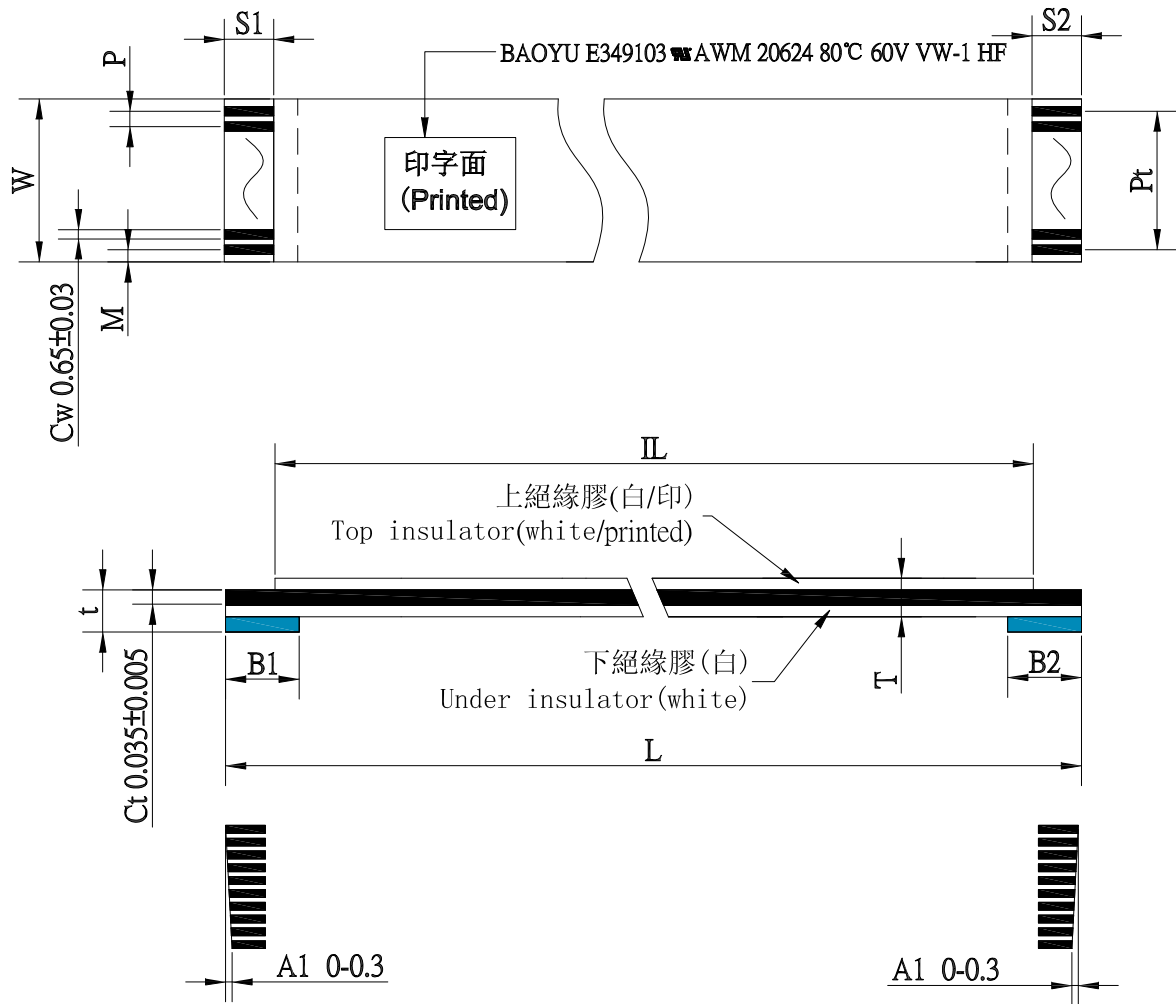

东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	11/27/15
CHECKED BY:	DATE
Jacky Chen	11/27/15
APPROVED BY:	DATE
Tony Kao	11/27/15

MAT'L		TITLE	FFC CABLE
FINISH		MODLE	FFC CABLE
SCALE	1 : 1	DWG NO.	FC13-xxxxx-S281
SHEET NO.	1 of 1	PART NO.	FC13-xxxxx-S281

SIZE	A4
VER	R