


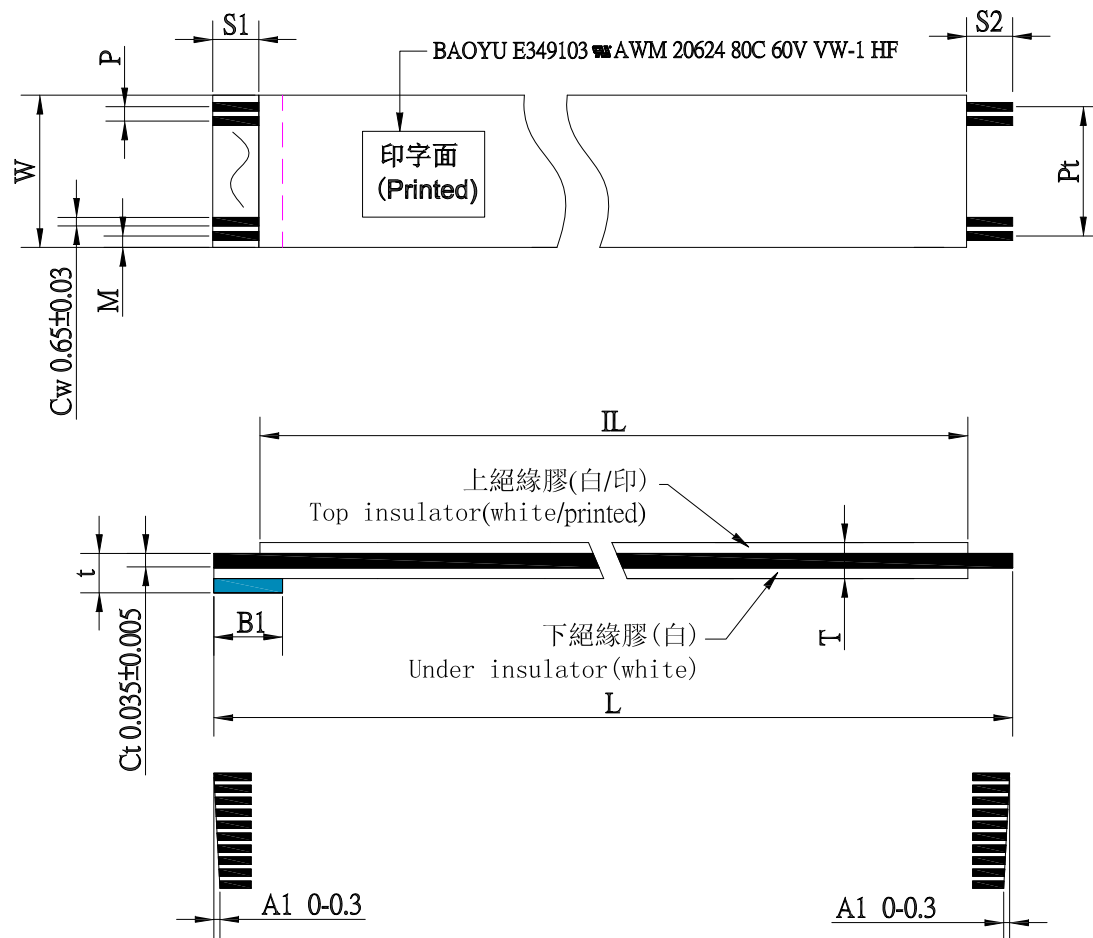

(Number of Conductors) N	X
(Pitch) P	0.50mm
(Total Pitch) Pt	X
(Total Length) L	X
(Film Length) IL	X
(Margin Width) M	X
(Total Width) W	X
(Strip Length) S1	X
(Strip Length) S2	X
(Stiffener) B1	X
(Stiffener) B2	X
(Slanting) A1	X
(Slanting) A2	X
(Terminal thickness) t	X
(Thickness) T	X

規格 (Spec)	0.5X×X×B1 (X/X/X) (0.035×0.65) (0.06+0.06)UL20624		
4	補強板 (Connecting)	0.250 (深藍色)	
3	上絕緣膠 (Top Insulation)	0.06(白/印字white/printed) 無鹵素皮膜	白色絕緣膠 / 綠色印字
2	下絕緣膠 (Under Insulation)	0.06 (白white)無鹵素皮膜	
1	導體 (Conductor)	0.035×0.65 (鍍錫Tin Plating)	
ITEM	DESCRIPTION	SPECIFICATION	REMARK

				 东莞市高迪电子有限公司 Dong Guan KDRR Electronic Switch JacK Co., Ltd.				DRAWN BY: DATE		MAT'L				TITLE		FFC CABLE	
								Jack Lu 11/27/15		FINISH				MODLE		FFC CABLE	
								CHECKED BY: DATE		SCALE		1 : 1		DWG NO.		FB11-xxx-S281	
								Jacky Chen 11/27/15		APPROVED BY: DATE		SHEET NO.		1 of 1		PART NO.	
				TOLERANCE UNLESS OTHERWISE STATED :		Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°		3RD. ANGEL'S				UNITS		MM			
ITEM NO.		DESCRIPTION		DRAWN		DATE											
A		B		C		D		E		F		G		H			