
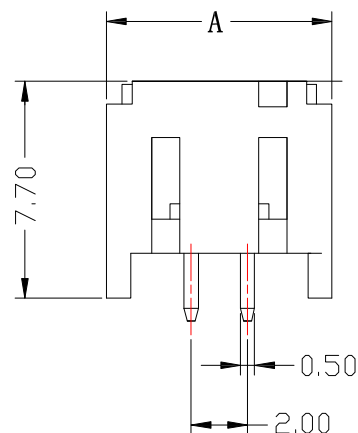


Specifications

- 1.Current Rating : 2.0A AC,DC
- 2.Voltage rating : 250V AC,DC
- 3.Temperature range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 4.Contact resistance : $10\text{m}\Omega$ Max
- 5.Insulation resistance : $1000\text{M}\Omega$ Min
- 6.Withstanding voltage : 800 V AC/minute

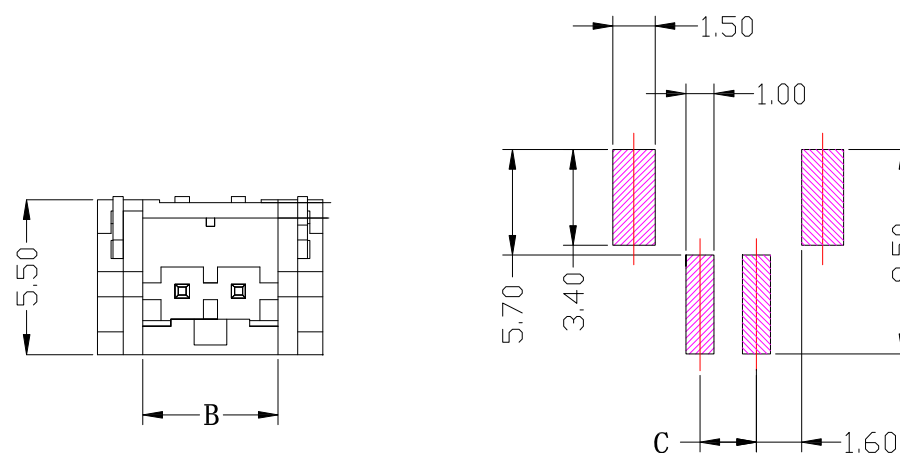

P.C.B Hole Layout

	A	B	C
2P	8.0	4.8	2.0
3P	10.0	6.8	4.0
4P	12.0	8.8	6.0
5P	14.0	10.8	8.0
6P	16.0	12.8	10.0
7P	18.0	14.8	12.0
8P	20.0	16.8	14.0
9P	22.0	18.8	16.0
10P	24.0	20.8	18.0
11P	26.0	22.8	20.0
12P	28.0	24.8	22.0
13P	30.0	26.8	24.0
14P	32.0	28.8	26.0
15P	34.0	30.8	28.0
16P	36.0	32.8	30.0



东莞市高迪电子有限公司
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^{\circ}$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
11/20/15
DATE
11/20/15
DATE
11/20/15

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	WAFER 2.0 SMT 90度
SCALE	1 : 1	DWG NO.	WF-2001RSxx-S304
SHEET NO.	1 of 1	PART NO.	WF-2001RSxx-S304

SIZE
A4
VER
R