

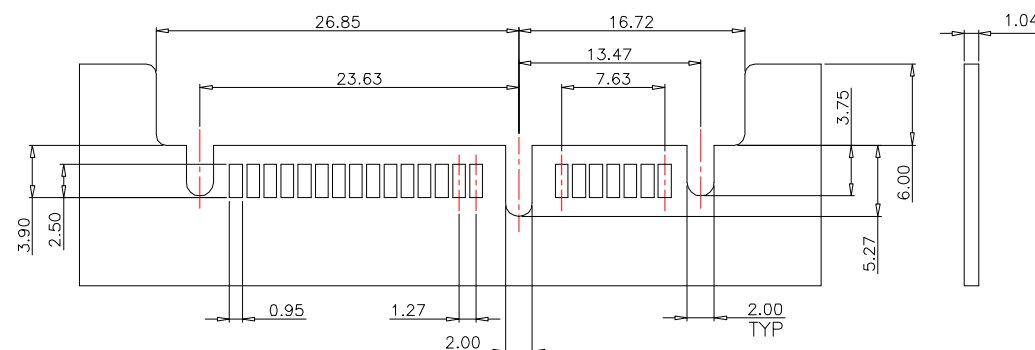
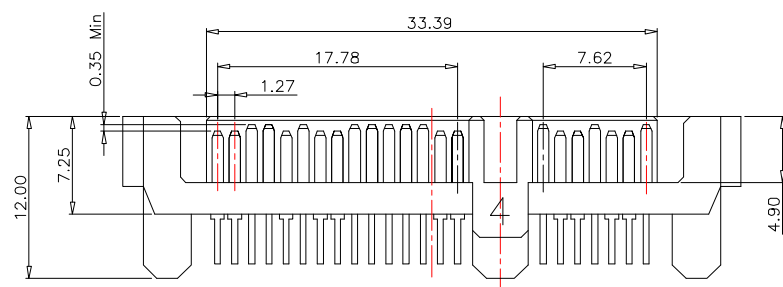


SECTION A-A



RECOMMENDED PCB LAYOUT



SPECIFICATION:

1.MATERIAL:

1.1 HOUSING: LCP , UL 94V-0 , Black.

1.2 CONTACT: BRASS

2.Finish:

2.1 CONTACT: PLATED TIN IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	10/13/14	FINISH		MODLE	SATA 7+15P 夹板式connector 公座
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SATA-M22-33S-S268
Jacky Chen	10/13/14	SHEET NO.	1 of 1	PART NO.	SATA-M22-33S-S268
APPROVED BY:	DATE				
Tony Kao	10/13/14				

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------