

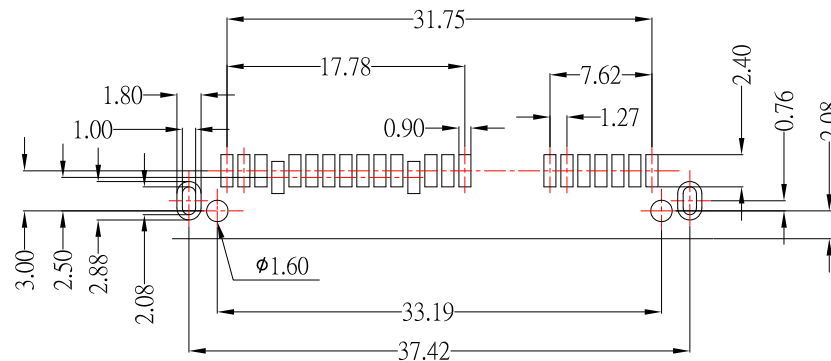


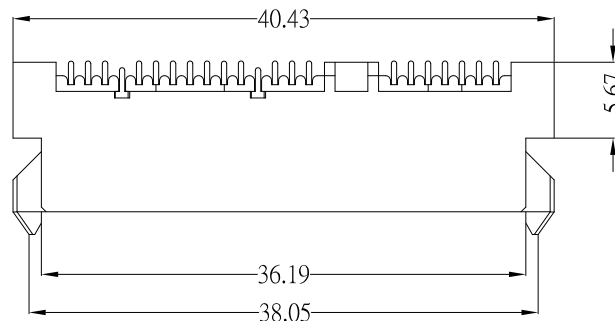




### RECOMMENDED PCB LAYOUT

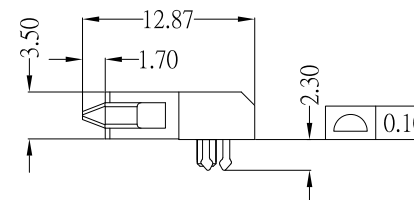

SATA-F22-35S-x-S268

鍍層厚度:

|             |
|-------------|
| Blank : 1u" |
| 2 : 15u"    |
| 3 : 30u"    |

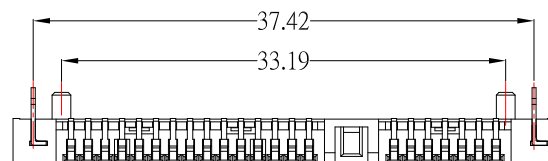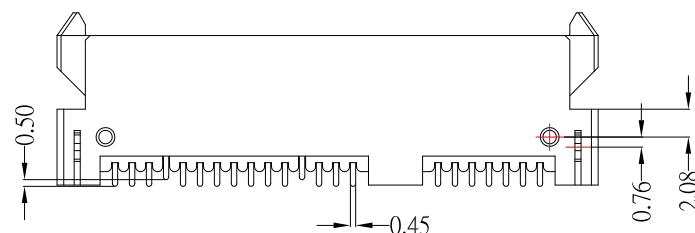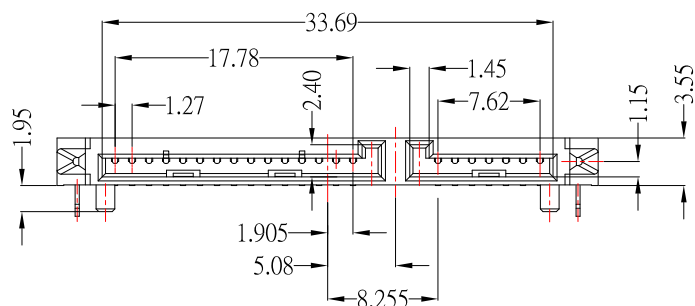

### SPECIFICATION:

#### 1.MATERIAL:

- 1.1 HOUSING: LCP , UL 94V-0 , Black.
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 BOARD: BRASS

#### 2.Finish:

- 2.1 CONTACT: PLATED TIN IN MATING AREA ;  
TIN PLATED ON SOLDER BALLS ;  
NICKEL UNDER PLATED OVERALL
- 2.2 BOARD: TIN PLATED ON SOLDER BALLS ;  
NICKEL UNDER PLATED OVERALL



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

|              |          |           |        |          |                             |
|--------------|----------|-----------|--------|----------|-----------------------------|
| DRAWN BY:    | DATE     | MAT'L     |        | TITLE    | CONNECTOR                   |
| Jack Lu      | 04/01/15 |           |        |          |                             |
| CHECKED BY:  | DATE     | FINISH    |        | MODLE    | SATA 7+15P Female R/A板下 SMT |
| Jacky Chen   | 04/01/15 |           |        |          | H:3.55mm                    |
| APPROVED BY: | DATE     | SCALE     | 1 : 1  | DWG NO.  | SATA-F22-35S-x-S268         |
| Tony Kao     | 04/01/15 | SHEET NO. | 1 of 1 | PART NO. | SATA-F22-35S-x-S268         |
|              |          |           |        |          | SIZE                        |
|              |          |           |        |          | A4                          |
|              |          |           |        |          | VER                         |
|              |          |           |        |          | A0                          |