
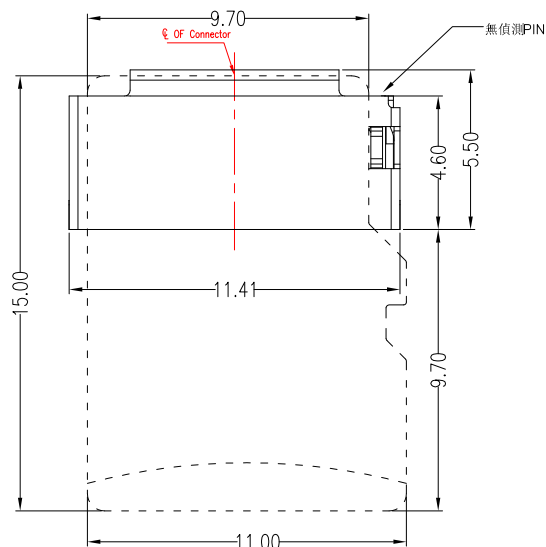
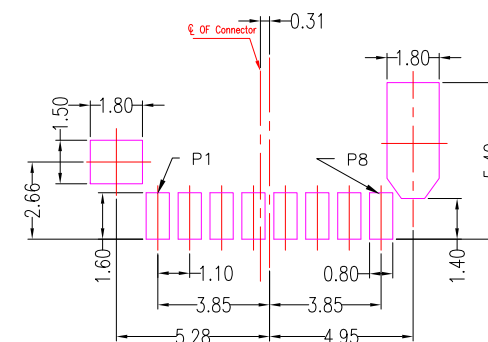




	DIM A	DIM B
2	2.65	1.45
5	3.00	1.86

[illegible]

Electrical :

- 1.Contact Resistance: 50 mΩ Max.
- 2.Insulation Resistance: 1000 MΩ Min.
- 3.Dielectric Withstanding Voltage: 500V RMS.
- 4.Life Cycles: 1500 cycles Min
- 5.Mate Force: 4.5kgf Max
- 6.Unmate Force: 0.5kgf Min

Environmental:

- 1.Operating Temperature: -25°C ~ +85°C.


Material:

- 1.Housing: LCP,Black
- 2.Contact: Copper Alloy
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	05/15/1

CHECKED BY:	DATE
Jacky Chen	05/15/1

APPROVED BY:	DATE:
Tony Kao	05/15/11

DATE _____

05/15/1

05/15/1

DATE
05/15/1

--	--

	MAT'L

[illegible]

SCALE

SHEET N

--	--

	TITLE
--	-------

DWG N
PART N

--	--

CONNECTOR

© 2006 The Authors
Journal compilation © 2006 Blackwell Publishing Ltd

0.	SD-TF03-1108
0.	SD-TF03-1108

	SIZE
--	------

	A4
	VER