







SD-TF03-1108x-S267

	DIM	A
5	3.00	
6	3.35	
7	3.75	

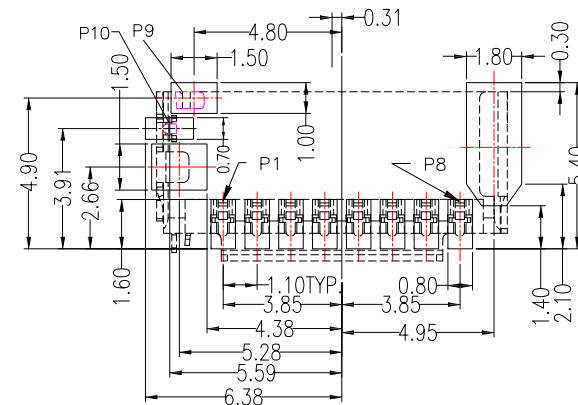

PCB LAYOYT

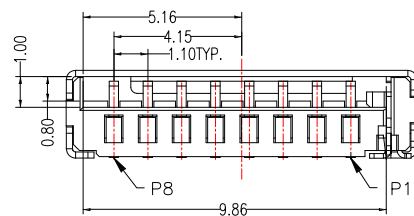

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
9	CD1
10	CD2

SPECIFICATION

Electrical :

- 1.Contact Resistance: 50 mΩ Max.
- 2.Insulation Resistance: 1000 MΩ Min.
- 3.Dielectric Withstanding Voltage: 500V RMS.
- 4.Life Cycles: 1500 cycles Min
- 5.Mate Force: 4.5kgf Max
- 6.Unmate Force: 0.5kgf Min

Environmental:

- 1.Operating Temperature: -25°C ~ +85°C.

7	更新高度選項	Jack	102517
6	更新高度選項	Jack	011617
5	新增尺寸	Jack	011217
4	PCB新增偵測pin 標示	Jack	121216
3	新增偵測pin 標示	Jack	120816
2	更新高度選項	Jack	120516
1	更新高度選項	Jack	102016
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	10/25/17
CHECKED BY:	DATE
Jacky Chen	10/25/17
APPROVED BY:	DATE
Tony Kao	10/25/17

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	MICRO SD 卡 短體帶偵測PIN
SCALE	1 : 1	DWG NO.	SD-TF03-1108x-S267
SHEET NO.	1 of 1	PART NO.	SD-TF03-1108x-S267
		SIZE	A4
		VER	R7