

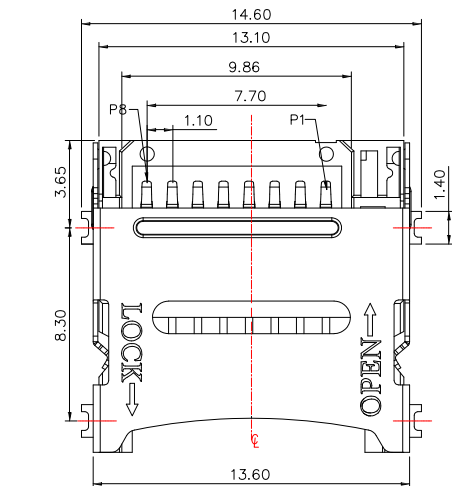

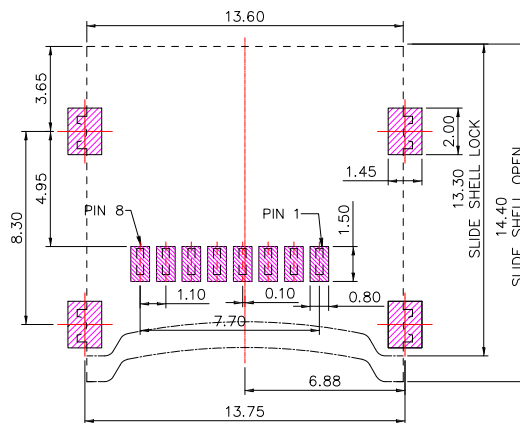


SLIDE SHELL LOCK



SLIDE SHELL OPEN

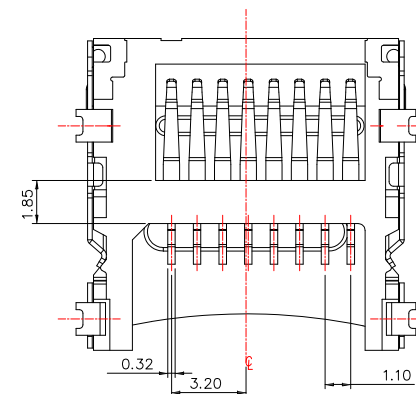

PCB LAYOUT

PIN NO.	PIN Assignmeng.
PIN 1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT 1

SPECIFICATION

Electrical :

1. Rating: 1.0A , 30V
- 2.Contact Resistance: 50 mΩ Max.
- 3.Insulation Resistance: 100 MΩ Min.
- 4.Operating Temperature: -20°C ~85°C

Material:

- 1.Housing: LCP,Black
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE
04/24/19
DATE
04/24/19
DATE
04/24/19

MAT'L
FINISH
SCALE
SHEET NO.

TITLE
MODLE
DWG NO.
PART NO.

CONNECTOR
Micro SD 卡座 H:1.8mm
SD-TF11-41808-S267
SD-TF11-41808-S267

SIZE
A4
VER
R4