
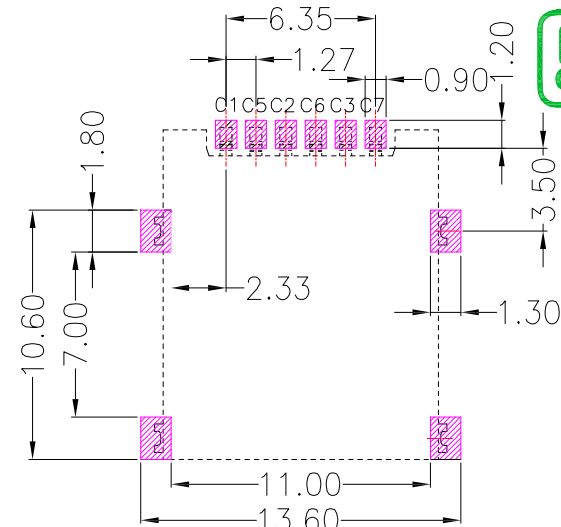
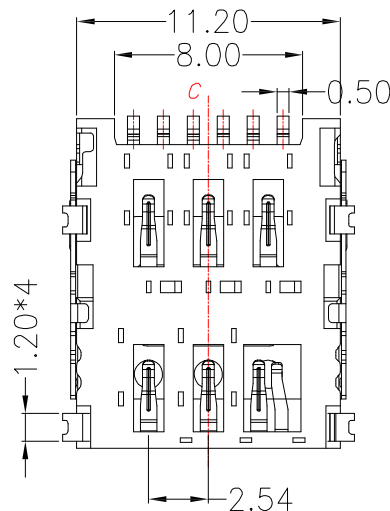
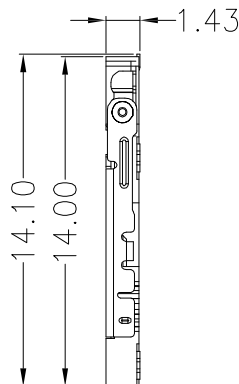


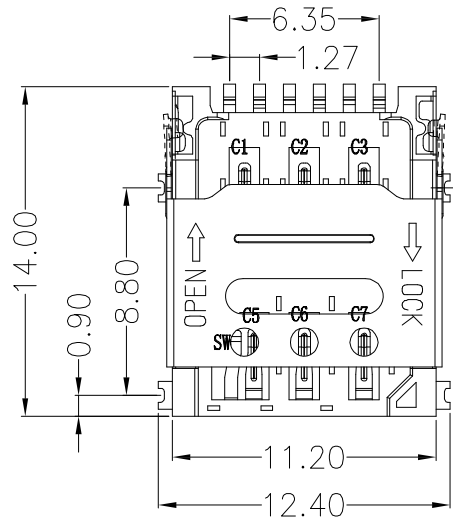

PCB LAYOYT

SPECIFICATION

Electrical :

- 1.Current Rating: 0.5mA AC / DC
- 2.Voltage Rating: 125VAC / DC
- 3.Contact Resistance: 80 mΩ Max.
- 4.Insulation Resistance: 100 MΩ Min.

Environmental:




- 1.Operating Temperature: -20°C ~ +60°C.

Material:

- 1.Housing: LCP
- 2.Contact: Copper Alloy
- 3.Shell: Stainless Steel

Finish:


- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

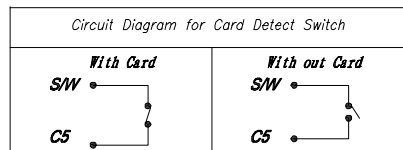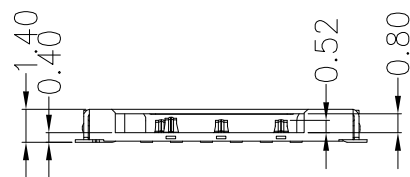


STEP 1 INSERT NANO SIM CARD



STEP 2 PUSH THE SHELL



STEP 3 FINISH

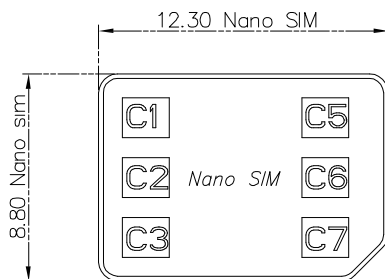

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	SWTSH PIN



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 07/11/19

CHECKED BY: Jacky Chen
DATE: 07/11/19

APPROVED BY: Tony Kao
DATE: 07/11/19

MAT'L

FINISH

SCALE

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

NANO SIM CARD CONNECTOR LIFTED COVER H:1.40 7P

NSIM-SFB007R-S304

NSIM-SFB007R-S304

SIZE
A4
VER
R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------