
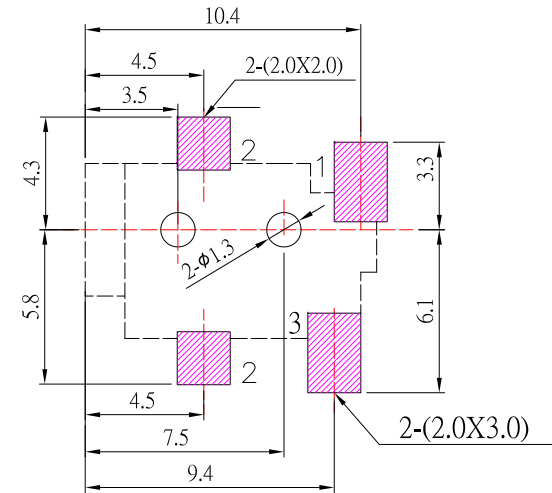
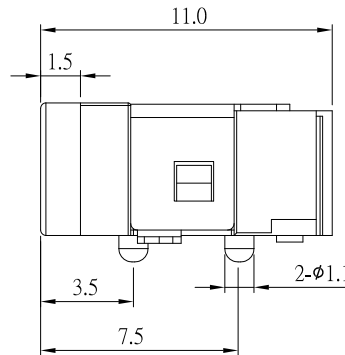
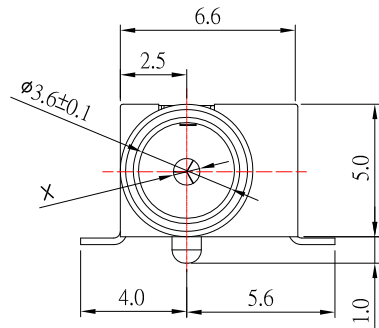
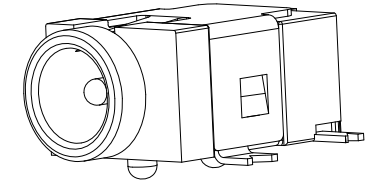

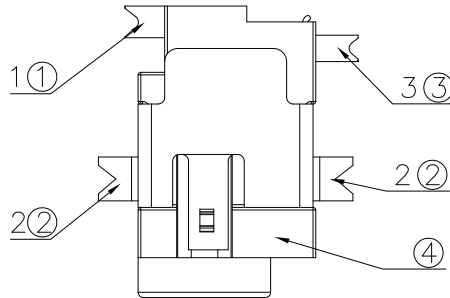


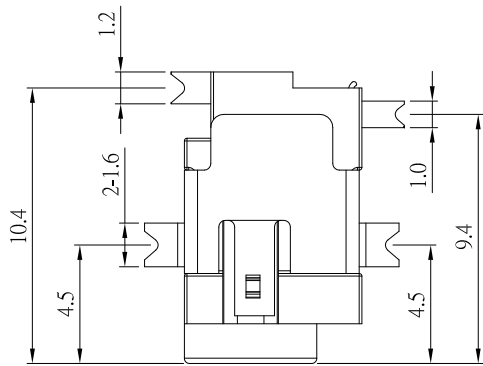

PCB LAYOUT TOP VIEW

|            |                |
|------------|----------------|
| MODEL NO.  | DC-060D-x-S187 |
| SCHEMATIC  | 2              |
|            | 1              |
|            | 3              |
| CENTER PIN | φ1.0 mm        |
|            | φ1.3 mm        |

SPECIFICATION

- 1.Rating : DC 16V 2.0A
- 2.Contact resistance :  $\leq 50m\Omega$
- 3.Insulation resistance :  $\geq 100M\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

|     |             |     |                 |            |
|-----|-------------|-----|-----------------|------------|
| ④   | HOUSING     | 1   | PA9T(Black)     |            |
| ③   | TERMINAL#3  | 1   | PHOSPHOR BRONZE | Ag-Plating |
| ②   | TERMINAL#2  | 1   | PHOSPHOR BRONZE | Ag-Plating |
| ①   | TERMINAL#1  | 1   | BRASS           | Ag-Plating |
| NO. | DESCRIPTION | QTY | MATERIAL        | PLATING    |



东莞市高迪电子有限公司

Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

|              |          |           |          |                |
|--------------|----------|-----------|----------|----------------|
| DRAWN BY:    | DATE     | MAT'L     | TITLE    | JACK           |
| Jack Lu      | 11/02/15 |           |          |                |
| CHECKED BY:  | DATE     | FINISH    | MODLE    | DC JACK        |
| Jacky Chen   | 11/02/15 |           |          |                |
| APPROVED BY: | DATE     | SCALE     | DWG NO.  | DC-060D-x-S187 |
| Tony Kao     | 11/02/15 | 1 : 1     |          |                |
|              |          | SHEET NO. | PART NO. | DC-060D-x-S187 |
|              |          | 1 of 1    |          |                |
|              |          |           |          | SIZE<br>A4     |
|              |          |           |          | VER<br>R1      |