

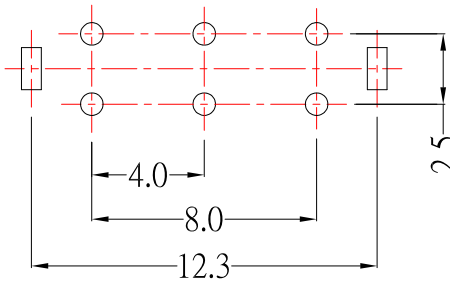


SCHEMATIC (NON-SHORTING)

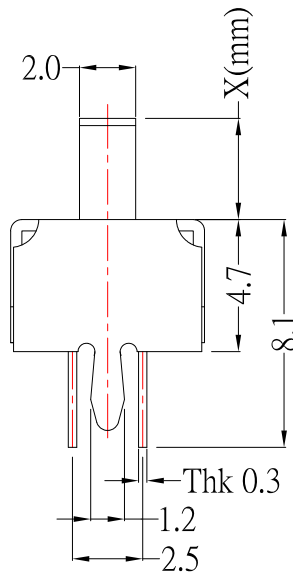

P.C.B MOUNTING PATTERN  
(BOTTOM VIEW)

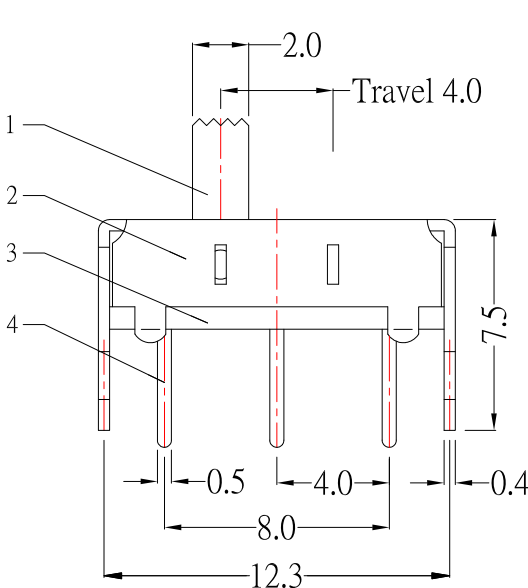

| Model No.   | X(mm) |
|-------------|-------|
| SS-22H06-G2 | 2mm   |
| SS-22H06-G3 | 3mm   |
| SS-22H06-G4 | 4mm   |
| SS-22H06-G5 | 5mm   |
| SS-22H06-G6 | 6mm   |
| SS-22H06-G7 | 7mm   |
| SS-22H06-G8 | 8mm   |
| SS-22H06-G9 | 9mm   |

SPECIFICATIONS

|                         |                |
|-------------------------|----------------|
| Rating                  | DC 50V 0.3A    |
| Circuit                 | 2P - 2T        |
| Timing                  | Non - Shorting |
| Contact Resistance      | 200mΩ Max.     |
| Insulation Resistance   | 100MΩ Min.     |
| Operating Force         | 300 ± 100gf    |
| Operating Life (cycles) | 10,000         |

|              |              |                 |     |                          |
|--------------|--------------|-----------------|-----|--------------------------|
| 6            | SPRING PLATE | STAINLESS STEEL | 4   | NATURAL                  |
| 5            | CONTACT CAP  | PHOSPHOR BRONZE | 2   | AG-CLAD                  |
| 4            | TERMINAL     | PHOSPHOR BRONZE | 12  | AG PLATED OVER NI PLATED |
| 3            | BASE         | PHENOLIC RESIN  | 1   | NATURAL                  |
| 2            | FRAME        | STEEL           | 1   | NI PLATED                |
| 1            | KNOB         | POM             | 1   | BLACK                    |
| NO PART NAME |              | MATERIAL        | QTY | FINISHING                |

|                        |  |                |           |        |          |                     |          |
|------------------------|--|----------------|-----------|--------|----------|---------------------|----------|
| DRAWN BY: Jack Lu      |  | DATE: 10/22/15 | MAT'L     |        | TITLE    | SWITCH              |          |
| CHECKED BY: Jacky Chen |  | DATE: 10/22/15 |           |        |          | MODLE: SLIDE SWITCH |          |
| APPROVED BY: Tony Kao  |  | DATE: 10/22/15 |           |        |          | DWG NO. SS-22H06-Gx |          |
|                        |  |                | SHEET NO. | 1 of 1 | PART NO. | SS-22H06-Gx         | SIZE: A4 |
|                        |  |                |           |        |          |                     | VER: R1  |



东莞市高迪电子有限公司  
Dong Guan KDRR Electronic Switch Jack Co., Ltd.

|                                     |  |                    |              |  |       |    |
|-------------------------------------|--|--------------------|--------------|--|-------|----|
| TOLERANCE UNLESS OTHERWISE STATED : |  | Up to 5 ±0.2       | 3RD. ANGEL'S |  | UNITS | MM |
|                                     |  | Above 5 ~ 15 ±0.3  |              |  |       |    |
|                                     |  | Above 15 ~ 30 ±0.4 |              |  |       |    |
|                                     |  | Above 30 ~ 50 ±0.5 |              |  |       |    |
|                                     |  | Angle ±0.3°        |              |  |       |    |

|          |             |       |        |
|----------|-------------|-------|--------|
| 1        | 新增SPEC      | Jack  | 102215 |
| ITEM NO. | DESCRIPTION | DRAWN | DATE   |