

状态：解锁

5.1 ± 0.3

3 ± 0.2

16.9 ± 0.2

2.5 ± 0.05

1.85 ± 0.05

6.5 ± 0.1

KDRR

Technical drawing of the KDRR logo with dimensions. The logo is a black silhouette of a stylized 'K' with an arrow pointing right, and the text 'KDRR' below it. Dimensions are given in millimeters.


Dimensions:

- Top width: 5 ± 0.1
- Middle width: 5.2 ± 0.1
- Bottom width: 5.35 ± 0.1
- Left side height: 2.2 ± 0.1
- Right side height: 14.05 ± 0.2
- Total height: 19.2 ± 0.2

Note: **面板厚度不得大于2.2mm

Technical drawing of a chair with dimensions in millimeters:

- Overall width: 65 ± 0.1
- Overall height: 153 ± 0.2
- Seat height: 49 ± 0.2
- Backrest height: 124 ± 0.2
- Armrest height: 153 ± 0.2
- Backrest width: 52 ± 0.2
- Seat width: 34 ± 0.1
- Backrest thickness: 2 ± 0.1

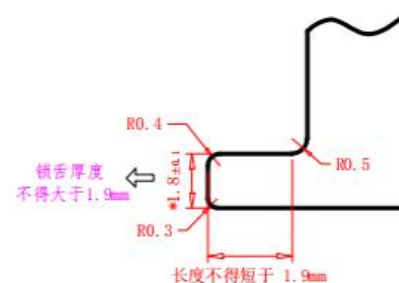

锁舌建议尺寸

抗拉力： $\geq 20\text{N}$ (约2kg)

长时间受力的，建议拉力小于10N

上锁行程:

解锁状态下压4.9mm后放开，
自动回弹 1.1 ± 0.1 mm

为锁住状态

解锁行程：

锁住状态下压1.1mm后放开，
自动回弹4.9mm±0.2mm

为解锁状态

物料清單	物料清單
按鍵	PA
外殼	PCM
彈簧	SUS304
卡扣	SUS304

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED		8				
PART NO.	Lock switch	CHECKED		UP TO 5	±0.2	7				
DRAW NO.	GD-PR-5	APPROVED		ABOVE 5 ~ 30	±0.3	6				
				ABOVE 30 ~ 50	±0.4	5				
				ABOVE 50	±0.5	4				
SCALE: 2:1	UNIT: mm	DATE:		ANGLE	±3°	3	SPRING	SUS	1	Ni PLATED
						2	HOUSING	POM	1	BLACK
						1	SLIDER	PA12	1	BLACK
						NO.	PARTS	MATERIAL	QTY.	FINISHING
						DONG GUAN GAODI ELECTRONICS CO., LTD.				

