
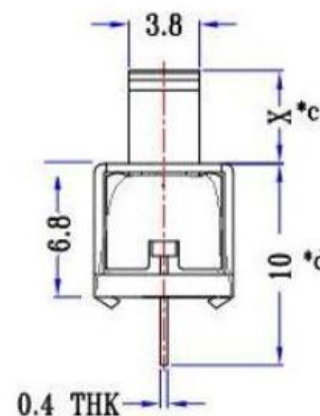
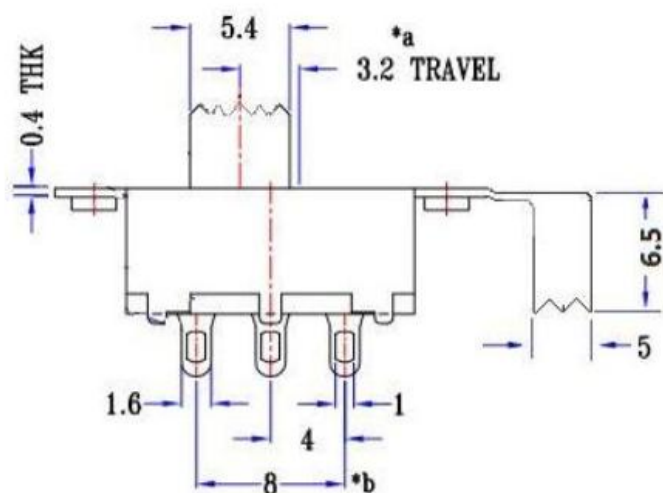



SCHEMATIC (NON-SHORTING)

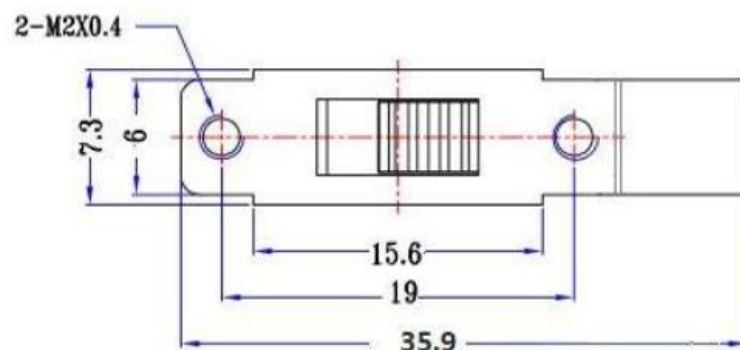

P.C.B LAYOUT  
BOTTOM VIEW

| X(mm) |
|-------|
| 2mm   |
| 3mm   |
| 4mm   |
| 5mm   |
| 6mm   |
| 7mm   |
| 8mm   |
| 9mm   |

SPECIFICATIONS

|                         |              |
|-------------------------|--------------|
| Rating                  | DC 50V 0.5A  |
| Circuit                 |              |
| Contact Resistance      | 200mΩ Max.   |
| Insulation Resistance   | 100MΩ Min.   |
| Operating Force         | 250gf ±100gf |
| Operating Life (cycles) | 10,000       |

| 7   | STEEL BALL   | 1   | STAINLESS       | Natural   |
|-----|--------------|-----|-----------------|-----------|
| 6   | SPRING       | 1   | STAINLESS       | Natural   |
| 5   | CONTACT CLIP | 1   | PHOSPHOR BRONZE | Ag-plated |
| 4   | TERMINAL     | 4   | BRASS           | Ag-plated |
| 3   | BASE         | 1   | PHENOLIC RESIN  | Natural   |
| 2   | FRAME        | 1   | SPCC            | Ni-Plated |
| 1   | KNOB         | 1   | POM             | Black     |
| NO. | DESCRIPTION  | QTY | MATERIAL        | REMARK    |



东莞市高迪电子有限公司  
DongGuan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS  
OTHERWISE STATED :

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD.  
ANGEL'S



UNITS

MM

DRAWN BY:

Jack Lu

DATE

11/20/14

MAT'L

TITLE

SWITCH

CHECKED BY:

Jacky Chen

DATE

11/20/14

FINISH

MODLE

SLIDE SWITCH

APPROVED BY:

Tony Kao

DATE

11/20/14

SCALE

1:1

DWG NO.

PART NO.

SHEET NO.

1 of 1

SIZE

A4

VER

R3

| ITEM NO. | DESCRIPTION | DRAWN | DATE     |
|----------|-------------|-------|----------|
| 3        | 新增SPEC      | Jack  | 11/20/14 |
| 2        | 更新材質        | Jack  | 04/02/14 |
| 1        | 更新尺寸6.0改5.8 | Jack  | 03/17/14 |