

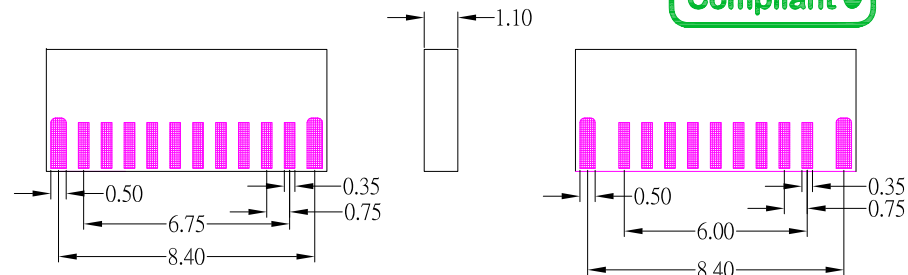



Blank : Brass	Blank : Nickel
I : Spcc	G : Au

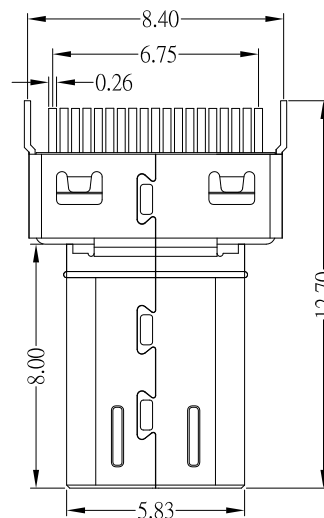

The technical drawing consists of two views: a top view (plan) and a side elevation.

- Top View:** Shows a rectangular base with a width of 8.40. A central feature has a width of 6.75 and a height of 0.26. The overall height of the assembly from the base to the top surface is 12.70.
- Side Elevation:** Shows the profile of the assembly. The total height is 8.00. The base has a width of 5.83. Internal features include a vertical slot with a width of 0.40 and a horizontal offset of 1.10 from the right edge. The bottom section has a width of 3.00 and a height of 2.00.

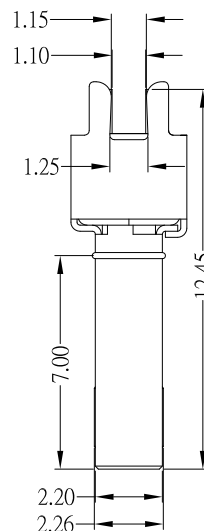

1. RATING: 40V , 0.3A
2. CONTACT RESISTANCE : 30 mΩ MAX
3. INSULATION RESISTANCE : 10 MΩ MIN
4. DIELECTRIC STRENGTH : 150V AC / 1 minute
5. DURABILITY : 5,000 cycles
6. TEMPERATURE RANGE : -25°C ~ +85°C

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: Brass / Spcc

1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall



Dong Guan KDRR Electronic Switch Jack Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5	± 0.2
	Above 5 ~ 15	± 0.3
	Above 15 ~ 30	± 0.4
	Above 30 ~ 50	± 0.5
	Angle	± 0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
Jack Lu	02/24/2

CHECKED BY:	DATE
Jacky Chen	02/24/2

APPROVED BY:	DATE:
Tony Kao	02/24/20

MATH

FINISH

SCALE

TITLE	CONNECTOR
-------	-----------

MODLE	HDMI D TYPE 公頭夾板式 板厚:1.2mm
-------	----------------------------

DWG NO.	HDMI-D-19PL3xx-S165
---------	---------------------

PART NO. HDMI-D-19PL3xx-S165

SIZE
A4

VER
D

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------